




Product information
G 4 E 1 M grau/grey
731 802-506

Name	
G 4 E 1 M grau/grey	
	
Panel-mounted connector for crimp contacts	
Delivery informations	
Availability	available
Product description	
Description	Panel-mounted connector for crimp contacts
Type	G 4 E 1 M grau/grey
Order No.	731 802-506
Type of contact	blade contacts
Number of contacts	4, alternatively 3 or 2
Standard	DIN VDE 0627 / IEC 61984
Housing Color	grey
Technical data	
Pin dimensions	2.8 mm x 0.8 mm
Rated voltage	AC/DC 50 V
Rated current	10 A
Contact resistance	<= 4 mOhm
Type of termination	crimp
Mounting	screws
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 HB
Approvals	
VDE	VDE
Packaging unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Scope of delivery	1 insulated casing without crimping contacts
Accessories to order separately	can be plugged into G 2 KW 1 F 1,5m, G 4 KW 1 F 2m, G 4 W 1 F grau/grey; flat gasket G 30 E-2, order no. 733 415-002 crimping contacts RMC 280, order no. 731 991-021



Picture
Drawing

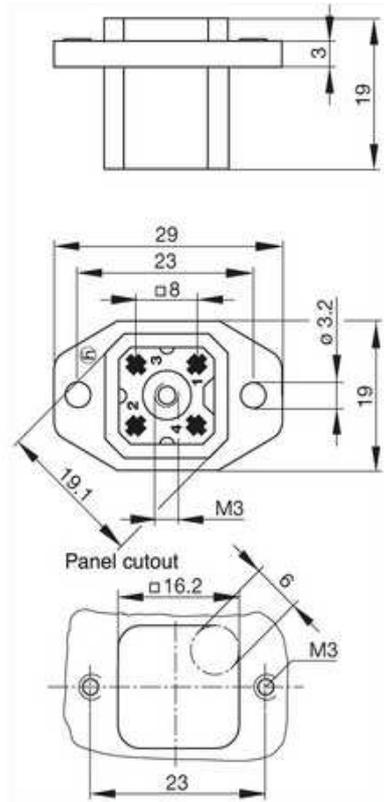

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.