




Product information
G 30 E 3 M grau/grey
731 996-506

Name	
G 30 E 3 M grau/grey	
	
Panel-mounted connector for crimp contacts	
Delivery informations	
Availability	available
Product description	
Description	Panel-mounted connector for crimp contacts
Type	G 30 E 3 M grau/grey
Order No.	731 996-506
Type of contact	blade contacts
Number of contacts	3 + PE, alternatively 2 + PE
Standard	DIN VDE 0627 / IEC 61984
Housing Color	grey
Technical data	
Pin dimensions	2.8 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	10 A
Contact resistance	<= 4 mOhm
Type of termination	crimp
Suitable cables	4 mm to 7.5 mm
Mounting	screws
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 HB
Approvals	
VDE	VDE
Packing unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Scope of delivery	1 insulated casing without crimping contacts
Accessories to order separately	can be plugged into G 30 KW 3 F 2m, G 30 W 3 F grau/grey, G 20 W 3 F grau/grey; flat gasket G 30 E-1, order no. 732 135-002 crimping contacts RMC 280, order no. 731 991-021



Picture

Drawing

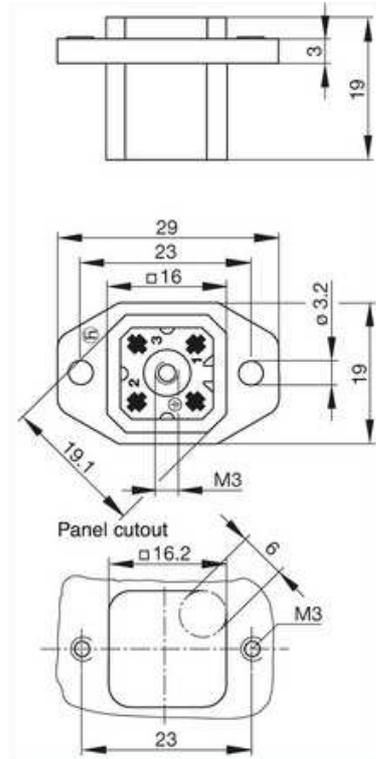

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.