




Product information

MAB 3 S

930 018-200

Name		MAB 3 S
		
		panel-mounted socket with flange; solder joint
<b>Delivery informations</b>		
Availability	available	
<b>Product description</b>		
Type	MAB 3 S	
Order No.	930 018-200	
Type of contact	female	
Description	panel-mounted socket with flange; solder joint	
Number of contacts	3	
Conductor size	<= 0.34 mm <sup>2</sup>	
<b>Technical data</b>		
LF output "Phone"	EN 60 130-09	
Pole arrangement DIN	DIN 41 524	
Rated current	4 A	
Rated voltage	AC/DC 34 V	
Type of termination	solder	
<b>Material</b>		
Contact material (socket)	brass	
Contact surface material	tin plated	
Contact bearer material	PA 66/UL standard 94V-2	
Housing material	steel, nickel-plated	
<b>Environmental conditions</b>		
Protection class (IEC 60529)	IP 30	
Temperature range	-20 °C to +60 °C	
<b>Picture</b>		

Drawing

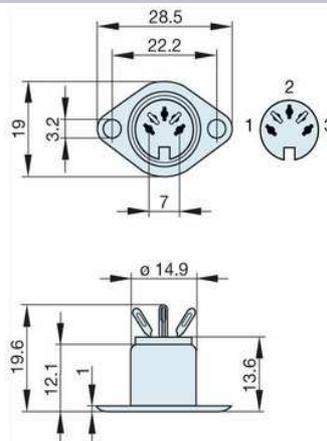

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.