




**Product information**  
**MASEI 3 schwarz/black**  
**930 063-500**

|  |  |
|--|--|
| <b>Name</b>  |  |
| MASEI 3 schwarz/black  |  |
|         |  |
| panel-mounted plug with flange; solder joint; die-cast housing and flange, nickel-plated |  |
| <b>Delivery informations</b>   |  |
| <b>Availability</b>  | available  |
| <b>Product description</b>   |  |
| <b>Type</b>  | MASEI 3 schwarz/black  |
| <b>Order No.</b>   | 930 063-500  |
| <b>Type of contact</b>   | male   |
| <b>Colour</b>  | black  |
| <b>Description</b>   | panel-mounted plug with flange; solder joint; die-cast housing and flange, nickel-plated |
| <b>Number of contacts</b>  | 3  |
| <b>Conductor size</b>  | $\leq 0.34 \text{ mm}^2$   |
| <b>Technical data</b>  |  |
| <b>LF output "Phone"</b>   | EN 60 130-09   |
| <b>Pole arrangement DIN</b>  | DIN 41 524   |
| <b>Rated current</b>   | 4 A  |
| <b>Rated voltage</b>   | AC/DC 34 V   |
| <b>Type of termination</b>   | solder   |
| <b>Material</b>  |  |
| <b>Contact material</b>  | brass  |
| <b>Contact surface material</b>  | tin plated   |
| <b>Contact bearer material</b>   | PA 66/UL standard 94V-2  |
| <b>Housing material</b>  | diecast  |
| <b>Environmental conditions</b>  |  |
| <b>Protection class (IEC 60529)</b>  | IP 30  |
| <b>Temperature range</b>   | -20 °C to +60 °C   |
| <b>Picture</b>   |  |

**Drawing**

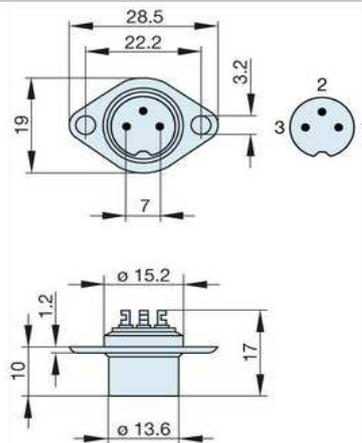

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.