




Product information
N6R AM 2 M20
931 592-004

| | |
|---|--|
| Name | |
| N6R AM 2 M20 | |
|  | |
| Panel-mounted connector with contact bearer in the casing (monoblock design) | |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | Panel-mounted connector with contact bearer in the casing (monoblock design) |
| Type | N6R AM 2 M20 |
| Order No. | 931 592-004 |
| Type of contact | male |
| Number of contacts | 6 + PE |
| Conductor size | max. 1.5 mm ² |
| Standard | DIN 43651 |
| Housing Color | grey |
| Technical data | |
| Pin dimensions | 1.6 mm |
| Rated voltage | AC/DC 250 V |
| Rated current | 10 A |
| Contact resistance | <= 5 mOhm |
| Type of termination | crimp |
| Suitable cables | 0.5 mm ² to 1.5 mm ² |
| Mounting | M20x1.5 |
| Material | |
| Contact surface material | Ag |
| Contact bearer material | PET |
| Housing material | PET |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Temperature range | -40 °C to +90 °C |
| Packing unit | |
| Packaging unit | 10 pieces |
| Scope of delivery and accessories | |
| Scope of delivery | 1 panel-mounted connector with O-Ring in polythene bag with assembly instructions |
| Accessories to order separately | can be plugged into N6R FF, N6R FF R, N6R EF; coding NC 6, order no. 831 002-011 protective cover SHK 1, order no. 733 849-011 contacts: RSC 162 |



Picture
Drawing

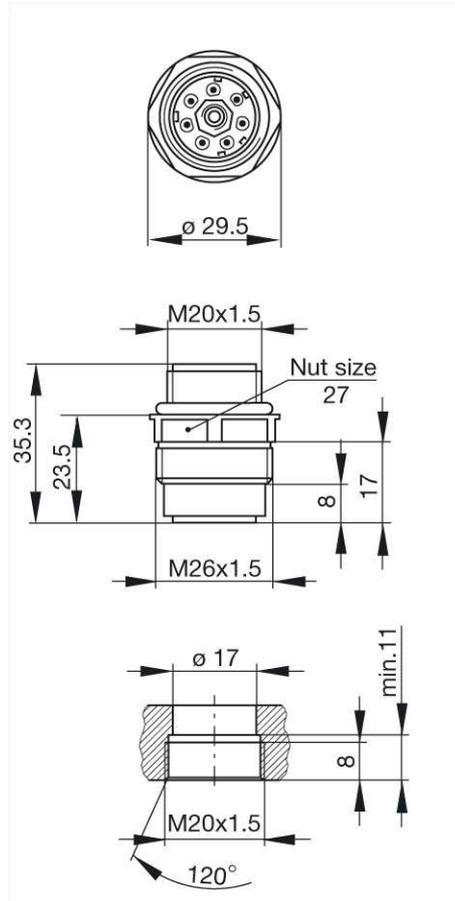

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.