




Product information
G 30 KW 3 F 2m
931 608-003

| | |
|---|--|
| Name | |
| G 30 KW 3 F 2m | |
|  | |
| Cable socket, with integrally molded lead | |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | Cable socket, with integrally molded lead |
| Type | G 30 KW 3 F 2m |
| Order No. | 931 608-003 |
| Type of contact | forked spring |
| Number of contacts | 3 + PE |
| Cable material | PVC |
| Cable length | 2 m |
| Conductor size | 4 x 1 mm ² |
| Cable type | H05 VV-F 4G1 |
| Standard | DIN VDE 0627 / IEC 61984 |
| Housing Color | grey |
| Technical data | |
| Rated voltage | AC/DC 250 V |
| Rated current | 10 A |
| Contact resistance | <= 4 mOhm |
| Material | |
| Contact surface material | Sn |
| Contact bearer material | PA |
| Housing material | PA |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Pollution severity | 3 |
| Temperature range | -40 °C to +90 °C |
| Inflammability class | |
| Housing | 94 HB |
| Contact bearer | 94 HB |
| Approvals | |
| VDE | VDE |
| Packing unit | |
| Packing unit | 20 pieces |
| Scope of delivery and accessories | |
| Scope of delivery | 1 cable socket with integrally molded lead, 1 central screw M 3 x 18, 1 gasket |
| Accessories to order separately | can be plugged into G 30 A 3 M grau/grey, G 30 E 3 M |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture
Drawing

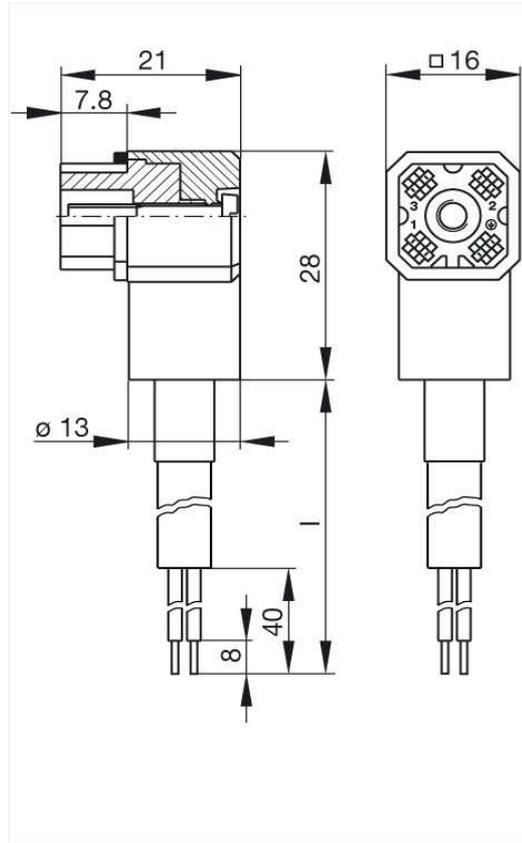

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.