




**Product information**  
**MAWI 80 SB UM grau/grey**  
**931 741-117**

|   |   |
|---|---|
| <b>Name</b>   |   |
| MAWI 80 SB UM grau/grey   |   |
|  |   |
| angled plug with insulated handle; solder joint                                   |   |
| <b>Delivery informations</b>  |   |
| <b>Availability</b>   | available   |
| <b>Product description</b>  |   |
| <b>Type</b>   | MAWI 80 SB UM grau/grey                                       |
| <b>Order No.</b>  | 931 741-117   |
| <b>Type of contact</b>  | male  |
| <b>Description</b>  | angled plug with insulated handle; solder joint               |
| <b>Housing Color</b>  | grey  |
| <b>Number of contacts</b>   | 8   |
| <b>Conductor size</b>   | $\leq 0.34 \text{ mm}^2$                                      |
| <b>Technical data</b>   |   |
| <b>LF output "Phone"</b>  | EN 60 130-09  |
| <b>Pole arrangement DIN</b>   | DIN 41 524 (pins 1-5)   |
| <b>Rated current</b>  | 4 A   |
| <b>Rated voltage</b>  | AC/DC 34 V  |
| <b>Cable diameter</b>   | 6.5 mm  |
| <b>Type of termination</b>  | solder  |
| <b>Material</b>   |   |
| <b>Contact material</b>   | brass   |
| <b>Contact surface material</b>   | tin plated  |
| <b>Contact bearer material</b>  | PA 66/UL standard 94V-2                                       |
| <b>Housing material</b>   | PE  |
| <b>Environmental conditions</b>   |   |
| <b>Protection class (IEC 60529)</b>   | IP 30   |
| <b>Temperature range</b>  | -20 °C to +60 °C  |
| <b>Scope of delivery and accessories</b>  |   |
| <b>Packaging</b>  | industry package, box; individual parts not assembled, sorted |



Picture  
Drawing

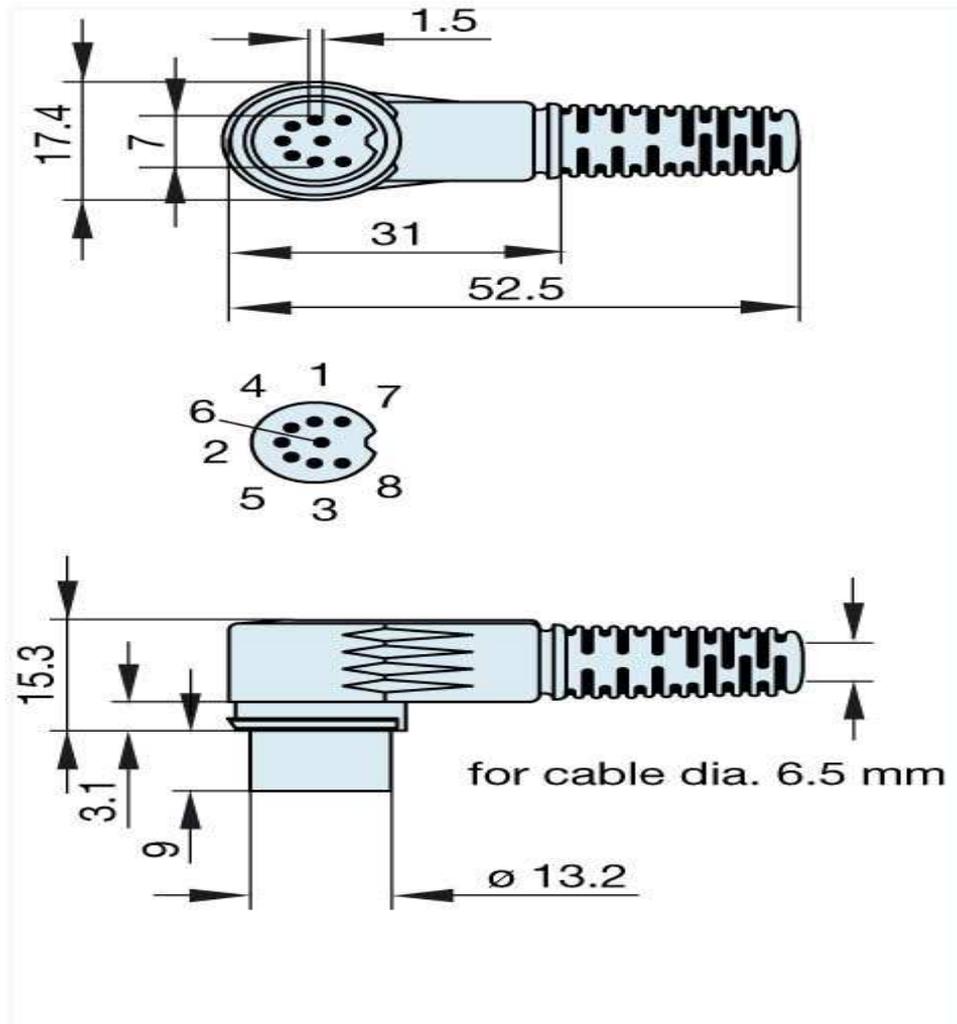

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.