




Product information
G 20 KW 3 M 1,5m
931 793-001

Name	
G 20 KW 3 M 1,5m	
	
Cable plug with integrally molded lead	
Delivery informations	
Availability	available
Product description	
Description	Cable plug with integrally molded lead
Type	G 20 KW 3 M 1,5m
Order No.	931 793-001
Type of contact	blade contacts
Number of contacts	2 + PE
Cable material	PVC
Cable length	1.5 m
Conductor size	3 x 0.75 mm ²
Cable type	H05 VV-F 3G0,75
Standard	DIN VDE 0627 / IEC 61984
Housing Color	grey
Technical data	
Pin dimensions	2.8 mm x 0.8 mm
Rated voltage	AC/DC 250 V
Rated current	10 A
Contact resistance	<= 4 mOhm
Mounting	central screw
Material	
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 65
Pollution severity	3
Temperature range	-40 °C to +90 °C
Inflammability class	
Housing	94 HB
Contact bearer	94 HB
Approvals	
VDE	VDE
Packing unit	
Packaging unit	20 pieces
Scope of delivery and accessories	
Scope of delivery	1 cable plug with integrally molded lead, 1 central screw M 3 x 18
Accessories to order separately	can be plugged into G 20 W 3 F grau/grey

Picture
Drawing

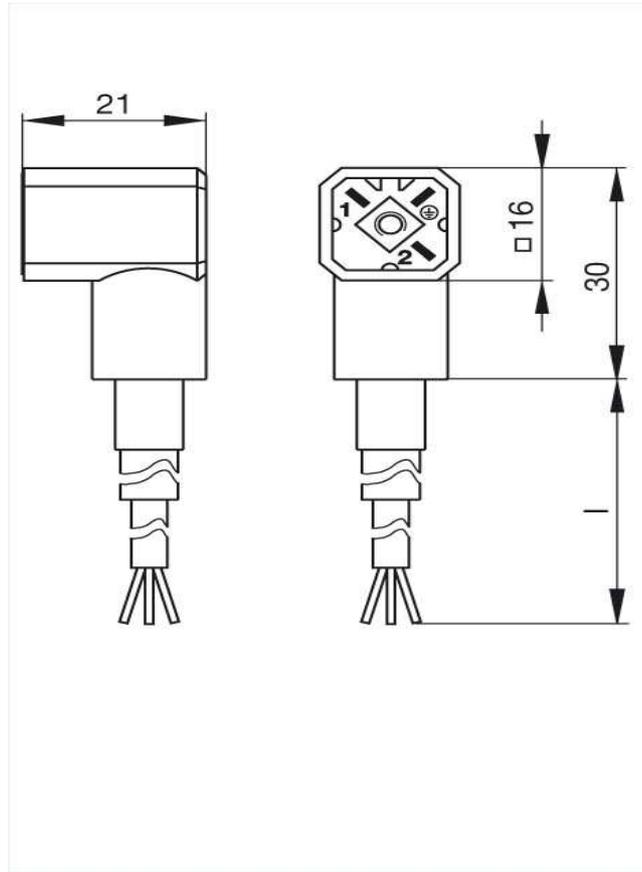

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.