




**Product information**  
**GSA-U 3075 SK schwarz/black**  
**933 381-100**

<b>Name</b>	
GSA-U 3075 SK schwarz/black	
	
molded appliance coupler (IP 65 enclosure) with 4 cross-head screws and insulation displacement contact (without solder/screw)	
<b>Delivery informations</b>	
<b>Availability</b>	available
<b>Product description</b>	
<b>Description</b>	molded appliance coupler (IP 65 enclosure) with 4 cross-head screws and insulation displacement contact (without solder/screw)
<b>Type</b>	GSA-U 3075 SK schwarz/black
<b>Order No.</b>	933 381-100
<b>Number of contacts</b>	3 + PE
<b>Standard</b>	DIN EN 175 301-803-A
<b>Housing Color</b>	black
<b>Construction type</b>	A
<b>Technical data</b>	
<b>Rated voltage</b>	AC/DC 400 V
<b>Rated current</b>	16 A
<b>Contact resistance</b>	<= 4 mOhm
<b>Type of termination</b>	insulation displacement contact(0.75 mm <sup>2</sup> ), wire diameter incl. insulation max. 2.4 mm
<b>Mounting</b>	screw
<b>Material</b>	
<b>Contact surface material</b>	Sn
<b>Contact bearer material</b>	PA
<b>Housing material</b>	PA
<b>Environmental conditions</b>	
<b>Protection class (IEC 60529)</b>	IP 65 (gasket necessary)
<b>Pollution severity</b>	3
<b>Temperature range</b>	-40 °C to +125 °C
<b>Inflammability class</b>	
<b>Contact bearer</b>	94 V-0
<b>Approvals</b>	
<b>UR</b>	UR
<b>Packing unit</b>	
<b>Packaging unit</b>	200 pieces
<b>Scope of delivery and accessories</b>	
<b>Accessories to order separately</b>	(NBR) flat gasket GSA 200-4, Order no. 730 843-002; (EPDM) flat gasket GSA 200-7, Order no. 730 268-003

Picture  
Drawing

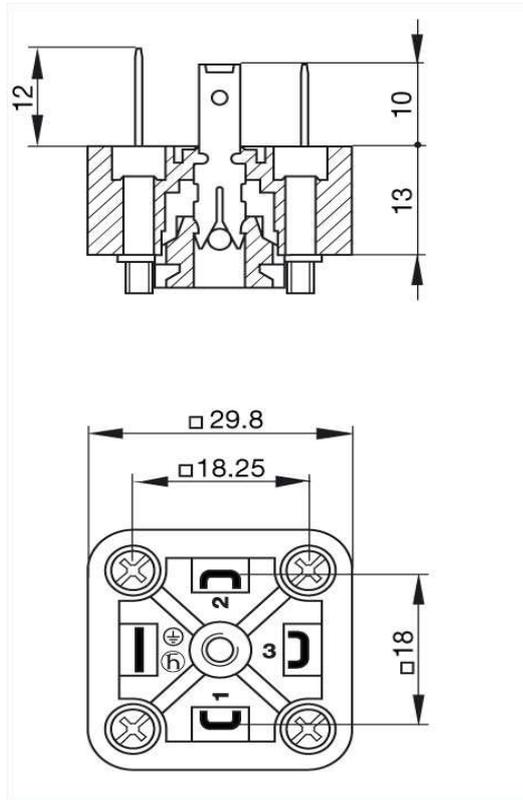

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.