




**Product information**  
**ELST 400 RD/12 V Au**  
**933 442-306**

<b>Name</b>	
ELST 400 RD/12 V Au	
Appliance connector for M12 sensors, press-in tube mounting, O-ring, anti-twist device, with sealable vent hole	
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Description	Appliance connector for M12 sensors, press-in tube mounting, O-ring, anti-twist device, with sealable vent hole
Type	ELST 400 RD/12 V Au
Order No.	933 442-306
Other standard types	tinned contacts, order no. 933 442-406
Type of contact	male
Number of contacts	4
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	grey
<b>Technical data</b>	
Pin dimensions	1 mm
Rated voltage	AC/DC 150 V
Rated current	4 A
Type of termination	solder, concave pins
Suitable cables	max. 0.5 mm <sup>2</sup>
<b>Material</b>	
Contact material	Cu Zn
Contact surface material	Au
Contact bearer material	PA
O-Ring	NBR
<b>Environmental conditions</b>	
Protection class (IEC 60529)	IP 68
Pollution severity	3
Temperature range	-25 °C to +90 °C
<b>Inflammability class</b>	
Contact bearer	94 V-2
<b>Approvals</b>	
UL	UL
<b>Packing unit</b>	
Packaging unit	100 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture  
Drawing

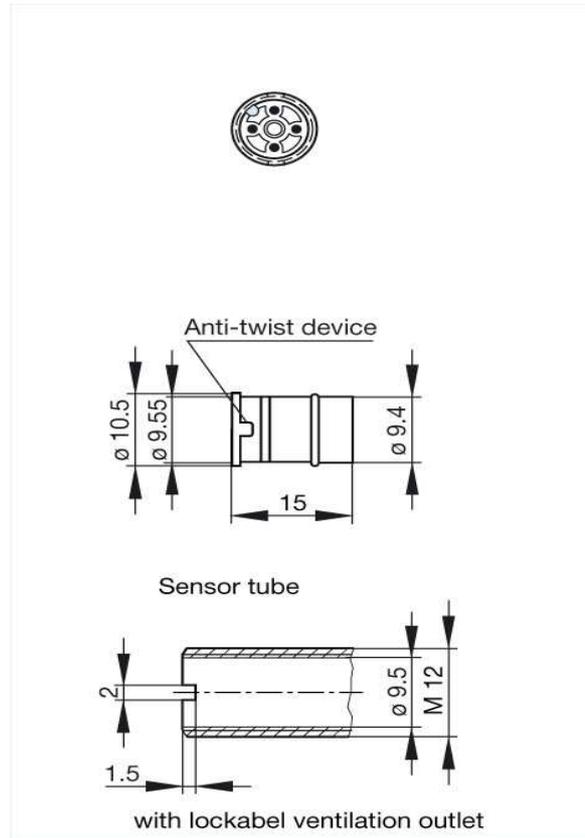

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.