




Product information
ELST 400 RD/12 V Sn
933 442-406

Name	
ELST 400 RD/12 V Sn	
	
Appliance connector for M12 sensors, press-in tube mounting, O-ring, anti-twist device, with sealable vent hole	
Delivery informations	
Availability	available
Product description	
Description	Appliance connector for M12 sensors, press-in tube mounting, O-ring, anti-twist device, with sealable vent hole
Type	ELST 400 RD/12 V Sn
Order No.	933 442-406
Other standard types	gold-plated contacts, order no. 933 442-306
Type of contact	male
Number of contacts	4
Standard	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
Housing Color	grey
Technical data	
Pin dimensions	1 mm
Rated voltage	AC/DC 150 V
Rated current	4 A
Type of termination	solder, concave pins
Suitable cables	max. 0.5 mm ²
Material	
Contact material	Cu Zn
Contact surface material	Sn
Contact bearer material	PA
O-Ring	NBR
Environmental conditions	
Protection class (IEC 60529)	IP 68
Pollution severity	3
Temperature range	-25 °C to +90 °C
Inflammability class	
Contact bearer	94 V-2
Approvals	
UL	UL
Packing unit	
Packaging unit	100 pieces



Picture
Drawing

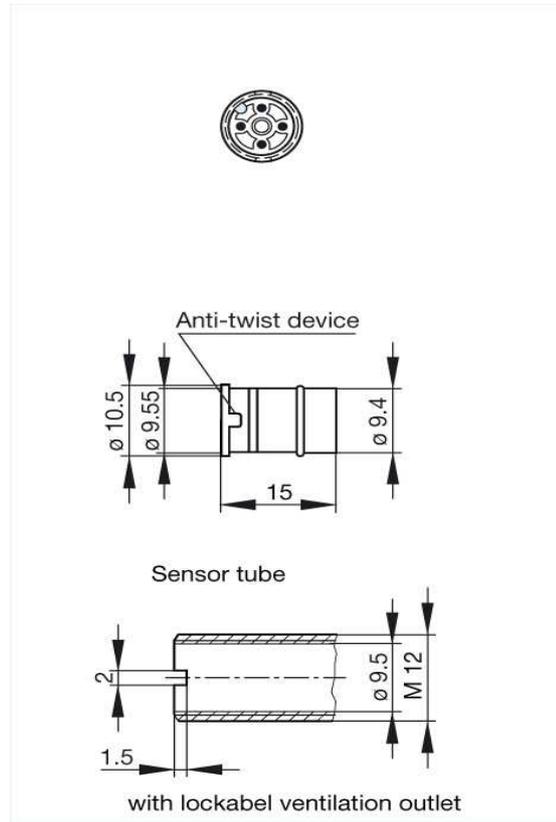

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.