




**Product information**  
**ELWIKA 4012 K PG7**  
**933 726-100**

|   |   |
|---|---|
| <b>Name</b>   |   |
| ELWIKA 4012 K PG7   |   |
|                |   |
| Angled cable socket, unassembled, strain relief by means of clamping cage, plastic coupling nut |   |
| <b>Delivery informations</b>  |   |
| <b>Availability</b>   | available   |
| <b>Product description</b>  |   |
| <b>Description</b>  | Angled cable socket, unassembled, strain relief by means of clamping cage, plastic coupling nut |
| <b>Type</b>   | ELWIKA 4012 K PG7   |
| <b>Order No.</b>  | 933 726-100   |
| <b>Type of contact</b>  | female  |
| <b>Number of contacts</b>   | 4   |
| <b>Cable gland</b>  | PG 7  |
| <b>Standard</b>   | IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2  |
| <b>Housing Color</b>  | black   |
| <b>Technical data</b>   |   |
| <b>Rated voltage</b>  | AC/DC 250 V   |
| <b>Rated current</b>  | 4 A   |
| <b>Type of termination</b>  | screw   |
| <b>Suitable cables</b>  | diameter 4 mm to 6 mm, max. 0.75 mm <sup>2</sup>  |
| <b>Material</b>   |   |
| <b>Contact material</b>   | Cu Zn   |
| <b>Contact surface material</b>   | Sn  |
| <b>Contact bearer material</b>  | PA  |
| <b>Housing material</b>   | PA  |
| <b>Coupling nut material</b>  | PA  |
| <b>O-Ring</b>   | NBR   |
| <b>Environmental conditions</b>   |   |
| <b>Protection class (IEC 60529)</b>   | IP 67   |
| <b>Pollution severity</b>   | 3   |
| <b>Temperature range</b>  | -25 °C to +90 °C  |
| <b>Inflammability class</b>   |   |
| <b>Housing</b>  | 94 V-2  |
| <b>Contact bearer</b>   | 94 V-2  |
| <b>Packaging unit</b>   |   |
| <b>Packaging unit</b>   | 100 pieces  |
| <b>Scope of delivery and accessories</b>  |   |
| <b>Accessories to order separately</b>  | protective cap M12 VS,<br>order no. 734 209-100   |

Picture  
Drawing

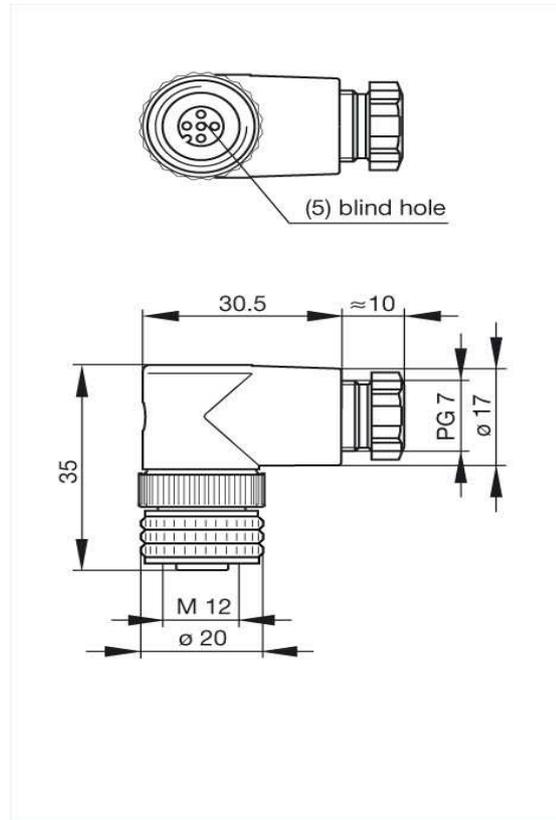

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.