




Product information
CM 02 L 14S-61 P F Metall/metal
934 390-001

Name	
	CM 02 L 14S-61 P F Metall/metal
	
	Surface mounted connector, with flange, with soldering pin
Delivery informations	
Availability	available
Product description	
Description	Surface mounted connector, with flange, with soldering pin
Type	CM 02 L 14S-61 P F Metall/metal
Order No.	934 390-001
Number of contacts	6 + PE
Standard	MIL-C 5015 bzw. VG 95 342
Housing Color	black
Technical data	
Pin dimensions	1.6 mm
Rated voltage	AC/DC 50 V
Rated current	2 A
Contact resistance	<= 5 mOhm
Type of termination	solder
Shell size	14S
Mounting	screws
Material	
Contact surface material	Ag
Contact bearer material	PA 66-GF 25
Housing material	Zn Al/Ni
Environmental conditions	
Protection class (IEC 60529)	IP 67
Pollution severity	3
Temperature range	-40 °C to +90 °C
Anbaufächentemperatur	up to 100 °C
Inflammability class	
Flammability, UL standard	94 V-1
Packing unit	
Packaging unit	100 pieces
Scope of delivery and accessories	
Scope of delivery	1 surface mounted connector
Accessories to order separately	can be plugged into CM 06 EA 14S-61 S; flat gasket CM 02 D 14S, order no. 733 321-002; cap CM 02 SD 14S, order no. 831 620-100; protective cover SHK 1, order no. 733 849-001

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture
Drawing

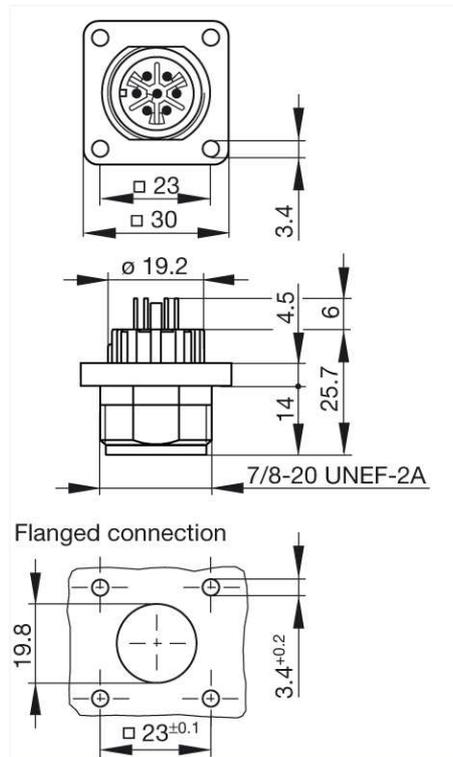

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.