



**Product information**


**EF12M4FIX Au**

**934 450-001**

<b>Name</b>	
	EF12M4FIX Au
	
	Screw-in appliance socket, M16 x 1,5 front mounting thread, with wire ends, screw- /M12 push-pull snap locking, O-ring included
<b>Delivery informations</b>	
<b>Availability</b>	no longer available
<b>Product description</b>	
<b>Description</b>	Screw-in appliance socket, M16 x 1,5 front mounting thread, with wire ends, screw- /M12 push-pull snap locking, O-ring included
<b>Type</b>	EF12M4FIX Au
<b>Order No.</b>	934 450-001
<b>Type of contact</b>	female
<b>Number of contacts</b>	4
<b>Cable material</b>	PVC
<b>Cable length</b>	0.2 m
<b>Conductor size</b>	0.34 mm <sup>2</sup>
<b>Standard</b>	IEC 61076-2-101 (Ed. 1)/ IEC 60947-5-2
<b>Housing Color</b>	metallic
<b>Technical data</b>	
<b>Wire stranding</b>	7 x 0.25 mm
<b>Rated voltage</b>	AC/DC 250 V
<b>Rated current</b>	4 A
<b>Material</b>	
<b>Contact material</b>	Cu Zn
<b>Contact surface material</b>	Au
<b>Contact bearer material</b>	PA
<b>Housing material</b>	Cu Zn/Ni
<b>O-Ring</b>	Viton
<b>Environmental conditions</b>	
<b>Protection class (IEC 60529)</b>	IP 67
<b>Pollution severity</b>	3
<b>Temperature range</b>	-25 °C to +90 °C
<b>Inflammability class</b>	
<b>Contact bearer</b>	94 V-2
<b>Approvals</b>	
<b>UL</b>	UL pending
<b>Packing unit</b>	
<b>Packaging unit</b>	100 pieces
<b>Scope of delivery and accessories</b>	
<b>Accessories to order separately</b>	protective cap M12 VS, order no. 734 209-100; fastening nut ELST M M16, order no. 735 413-002

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture  
Drawing

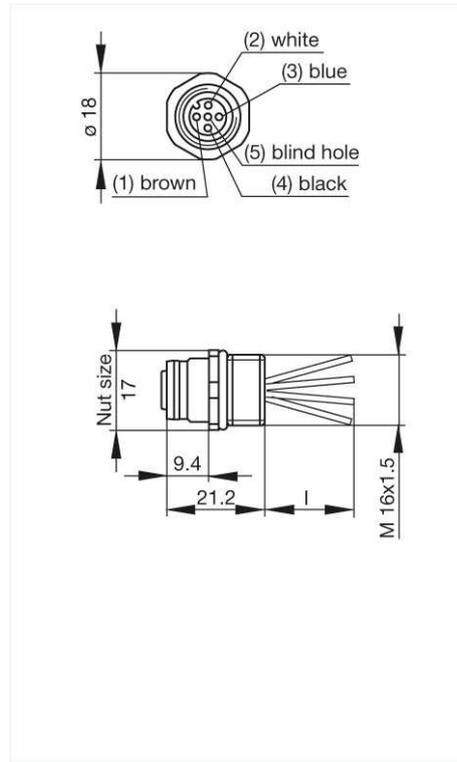

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.