



Adapter

- for connecting \varnothing 2 mm - system to \varnothing 2.4 mm - system


order no. A 20 - 24 / ..(colour)

- contact part

nickel-plated

- insulation

PA 6.6 (Polyamid)

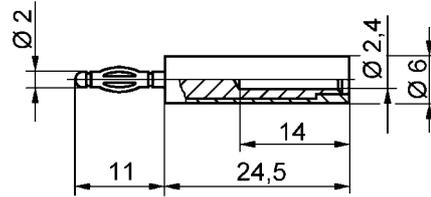

colours:

see table

Adapter

- for connecting \varnothing 2 mm - system to \varnothing 4 mm - system


order no. A 20 - 40 S / ..(colour)

- contact part:

nickel-plated

- insulation

PA 6.6 (Polyamid)

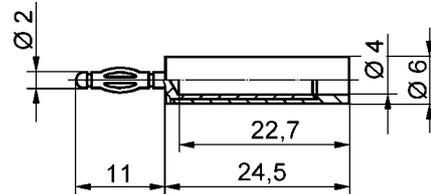

colours:

see table

Adapter

- for connecting \varnothing 4 mm - system to \varnothing 2 mm - system


order no. A 40 - 20 / ..(colour)

- contact part:

nickel-plated

- insulation

PA 6.6 (Polyamid)

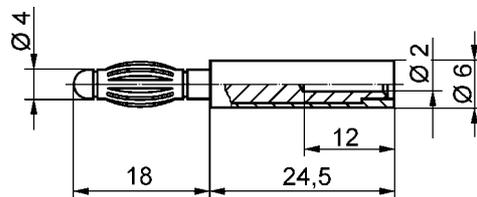

colours:

see table

General information		Technical data				
order no.	colours	terminal	transition resistance	rated voltage	rated current	operating temperature
A 20 - 24 / .. (colour) contact part nickel-plated	black red	socket	6 m Ω	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C
A 20 - 40 S / .. (colour) contact part nickel-plated	black red	socket	6 m Ω	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C
A 40 - 20 / .. (colour) contact part nickel-plated	black red	socket	6 m Ω	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C

other colours and platings on request