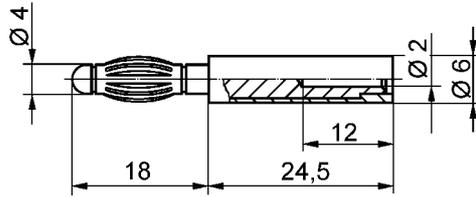


ø 4 mm Programme adapters


Adapter

- for connecting ø 4 mm - system to ø 2 mm - system

order no. A 40 - 20 / ..(colour)

- contact part

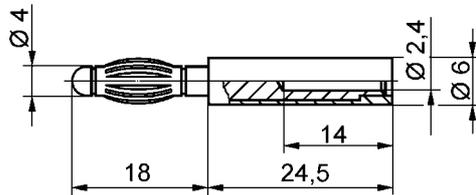
nickel-plated

- insulation

PA 6.6 (Polyamid)

colours:

see table


Adapter

- for connecting ø 4 mm - system to ø 2.4 mm - system

order no. A 40 - 24 / ..(colour)

- contact part

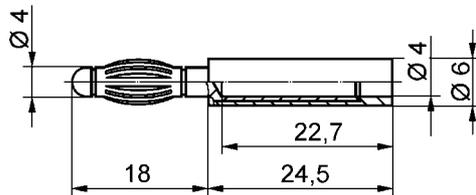
nickel-plated

- insulation

PA 6.6 (Polyamid)

colours:

see table


Adapter

- for connecting ø 4 mm - system to ø 4 mm safety - system

order no. A 40 - 40 S / ..(colour)

- contact part

nickel-plated

- insulation

PA 6.6 (Polyamid)

colours:

see table

General information		Technical data				
order no.	colours	terminal	transition resistance	rated voltage	rated current	operating temperature
A 40 - 20 / .. (colour) contact parts nickel-plated	black red	socket	6 mΩ	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C
A 40 - 24 / .. (colour) contact parts nickel-plated	black red	socket	6 mΩ	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C
A 40 - 40 S / .. (colour) contact parts nickel-plated	black red	socket	6 mΩ	30 V _{AC} 60 V _{DC}	10 A	- 25 °C ... + 90 °C

other colours and platings on request