




**Product information**  
**ASBS 2 M12-5S**  
**11122**

<b>Name</b>	
ASBS 2 M12-5S	
	
T-connector, M12 male connector with two M12 female connectors, 5 poles, Pin 2 (female connector) n.c., with self locking threaded	
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Type	ASBS 2 M12-5S
Order No.	11122
Description	T-connector, M12 male connector with two M12 female connectors, 5 poles, Pin 2 (female connector) n.c., with self locking threaded
Number of contacts	5
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
<b>Classification</b>	
Belden brand	Lumberg-Automation
<b>Environmental conditions</b>	
Environmental temperature	-25 °C ... 90 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
<b>Materials</b>	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU, self-extinguishing
Contact bearer material, side 2	PA-GF, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
<b>Electrical data</b>	
Contact resistance	≤ 5 mΩ
Rated current In	4 A per outlet / 4 A max. at 40 °C
Nominal voltage	60 V
Rated voltage	63 V
Test voltage	1.5 kV eff./60 s
Insulation resistance	> 1 GΩ
<b>Approvals</b>	
Approvals	UL



Picture  
Drawing

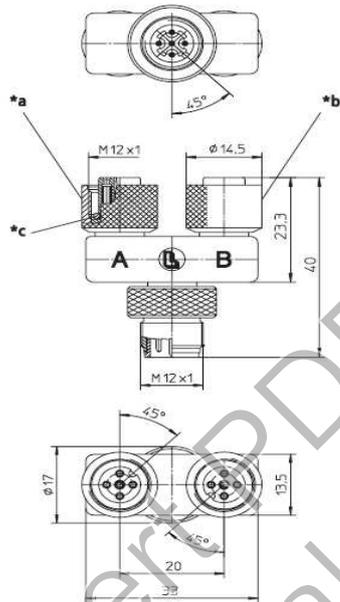

- \*a Mutter schwarz  
coupling nut black
- \*b Mutter vernickelt  
coupling nut nickel-plated

EXPERIMENTAL