



**Product information**

**ASBS 8 5-4**


**11129**

Name	
ASBS 8 5-4	
	
Pluggable actuator/sensor distribution box, 8 port version, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, earth connection, M23 connection for the control cable.	
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Type	ASBS 8 5-4
Order No.	11129
Description	Pluggable actuator/sensor distribution box, 8 port version, combined FIXCOM/M12 socket, 4-pole, 1 signal per socket, earth connection, M23 connection for the control cable.
Number of contacts	4 (M12)
Version	8 ports
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
<b>Classification</b>	
Belden brand	Lumberg-Automation
<b>Mechanical data</b>	
Thread	M12
LED display present	✘
<b>Environmental conditions</b>	
Environmental temperature	-15 °C ... 80 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
<b>Materials</b>	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	PA-GF, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
<b>Electrical data</b>	
Contact resistance	≤ 5 mΩ
Rated current In	4 A per socket / 12 A max. at 40°C
Nominal voltage	60 V
Rated voltage	63 V
Test voltage	1.0 kV eff./60 s
Insulation resistance	> 1 GΩ
<b>Approvals</b>	
Approvals	cURus
<b>Scope of delivery and accessories</b>	
Scope of delivery	ZVK: 2 dust covers for unused sockets ZBS: 10 attachable labels

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture  
Drawing

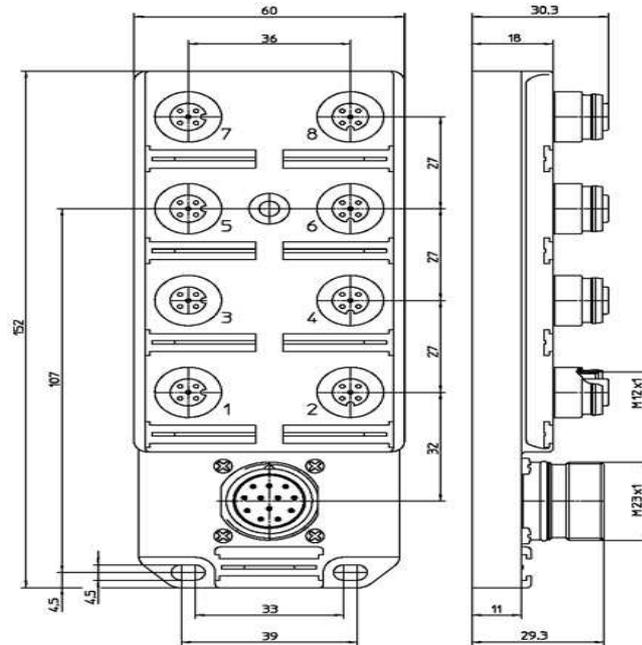

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.