




Product information
RSME 3
11654

| | |
|---|---|
| Name | |
| RSME 3 | |
|  | |
| Receptacle connector, M8 male connector for sensors with long solder contacts, solid contacts on solder side, 3 poles | |
| Delivery informations | |
| Availability | available |
| Product description | |
| Type | RSME 3 |
| Order No. | 11654 |
| Description | Receptacle connector, M8 male connector for sensors with long solder contacts, solid contacts on solder side, 3 poles |
| Note | The application of these products in harsh environments should always be checked before use. |
| Number of contacts | 3 |
| Color of housing | without |
| Product characteristics | Oil resistance |
| Classification | |
| Belden brand | Lumberg-Automation |
| Mechanical data | |
| Type of plug-in contact | Male connector |
| Design of housing | straight |
| Thread | M8 |
| Design of electrical connection | solder connection |
| LED display present | ✘ |
| Environmental conditions | |
| Environmental temperature | -25 °C ... 80 °C |
| Pollution degree | 3 |
| Materials | |
| Contact bearer material | PA |
| Contact material | CuZn |
| Contact material - Surface refinement | pre-nickelated and 0.8 microns gold-plated |
| Electrical data | |
| Contact resistance | ≤ 5 mΩ |
| Rated current In | 4 A at 40°C |
| Nominal voltage | 60 V |
| Rated voltage | 63 V |
| Test voltage | 1.5 kV eff./60 s |
| Insulation resistance | > 1 GΩ |



Picture
Drawing

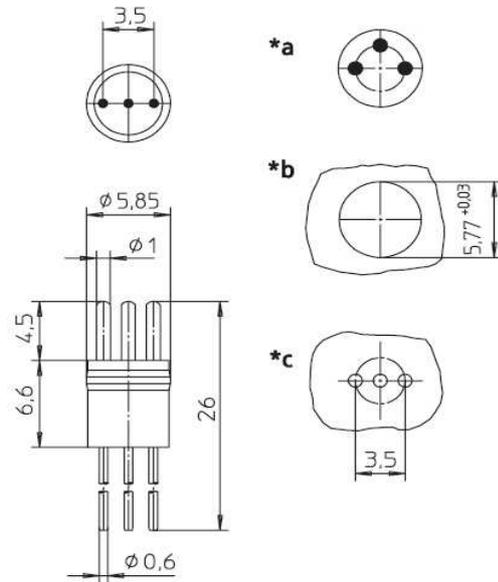

3-polig
3 poles



- *a Steckseite
front view
- *b Einbauöffnung
cut out
- *c Lochbild in der Leiterplatte
hole pattern in printed circuit board