




Product information
RSMCK 4
28045

Name	
	RSMCK 4
	
	Field attachable connector, M8 male connector with threaded joint, assembling with screw terminals, 4 poles
Delivery informations	
Availability	available
Product description	
Type	RSMCK 4
Order No.	28045
Description	Field attachable connector, M8 male connector with threaded joint, assembling with screw terminals, 4 poles
Note	The application of these products in harsh environments should always be checked before use.
Number of contacts	4
Color of housing	black
Product characteristics	Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Type of plug-in contact	Male connector
Design of housing	straight
Thread	M8
Design of electrical connection	screw connection
Connectable conductor cross-section multiple wire (without sleeve)	0.14-0.50 mm ²
LED display present	✘
Environmental conditions	
Environmental temperature	-40 °C ... 85 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	PA
Contact bearer material	TPU, self-extinguishing
Contact material	CuZn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current I _n	4 A at 40°C
Nominal voltage	30 V
Rated voltage	36 V
Test voltage	0.8 kV eff./60 s
Insulation resistance	> 1 GΩ

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.

Picture
Drawing

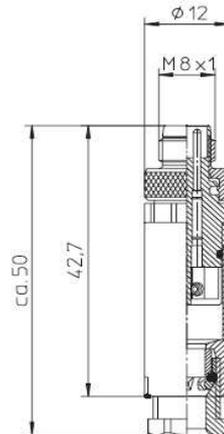

4-polig
4 poles



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.