




Product information
RSC 190/9
53647


Name	
RSC 190/9	
	
Field Attachable Connector, M23 male connector with threaded joint, assembling with solder connections, screw joint for cable PG 9, 19 poles	
Delivery informations	
Availability	available
Product description	
Type	RSC 190/9
Order No.	53647
Description	Field Attachable Connector, M23 male connector with threaded joint, assembling with solder connections, screw joint for cable PG 9, 19 poles
Number of contacts	19
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable, EMC resistance, UV resistance
Mechanical data	
Type of plug-in contact	Male connector
Thread	M23
Design of electrical connection	connector M23
Environmental conditions	
Environmental temperature	-40 °C ... 90 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	Cu Be, tin-plated
Contact bearer material	PBT
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Electrical data	
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	1,5 kV eff./60 s
Approvals	
Approvals	RoHS 2002/95/EG



Picture
Drawing

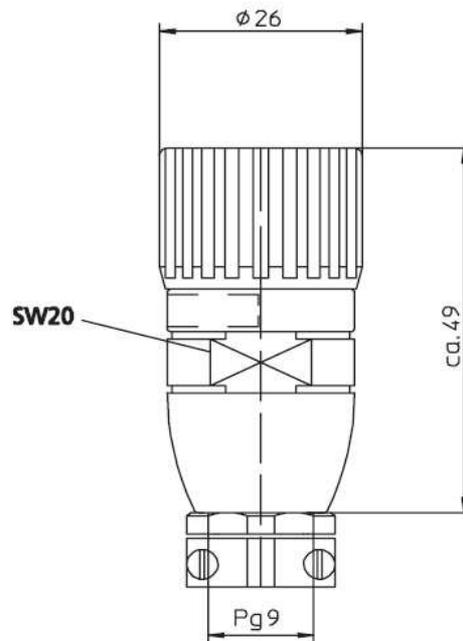

19-polig
19 poles



The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.