



**Product information**  
**ASBV 6/LED 5-332/... M -**  
**ASBV 6/LED 5-332/5 M**  
**60674**


<b>Name</b>	
ASBV 6/LED 5-332/... M	
	
Actuator/sensor distribution box, 6-port version, with LED operation and function indicators, combined FIXCON-/M12 socket, 5-pole, 2 signals per socket, earth connection, fixed connection cable, PUR jacket, halogen-free, black, 5 meter.	
<b>Delivery informations</b>	
<b>Availability</b>	available
<b>Product description</b>	
<b>Type</b>	ASBV 6/LED 5-332/5 M
<b>Order No.</b>	60674
<b>Description</b>	Actuator/sensor distribution box, 6-port version, with LED operation and function indicators, combined FIXCON-/M12 socket, 5-pole, 2 signals per socket, earth connection, fixed connection cable, PUR jacket, halogen-free, black, 5 meter.
<b>Number of contacts</b>	5 (M12)
<b>Version</b>	6 ports
<b>Color of housing</b>	orange
<b>Product characteristics</b>	Vibration resistance, Oil resistance, Drag chains suitable
<b>Classification</b>	
<b>Belden brand</b>	Lumberg-Automation
<b>Mechanical data</b>	
<b>Thread</b>	M12
<b>LED display present</b>	✓
<b>Environmental conditions</b>	
<b>Environmental temperature</b>	-15 °C ... 80 °C
<b>Degree of protection (IP), mounted</b>	IP67
<b>Pollution degree</b>	3
<b>Materials</b>	
<b>Housing material / Molded body</b>	TPU, self-extinguishing
<b>Contact bearer material</b>	PA-GF, self-extinguishing
<b>Contact material</b>	CuZn (M12)
<b>Contact material - Surface refinement</b>	pre-nickel and 0.8 microns gold-plated
<b>Knurled screw / nut material</b>	CuZn, nickel-plated
<b>Sealing material</b>	FKM
<b>Electrical data</b>	
<b>Contact resistance</b>	≤ 5 mΩ
<b>Rated current In</b>	4 A per socket / 12 A max. at 40°C
<b>Nominal voltage</b>	10 - 30 V DC
<b>Rated voltage</b>	32 V
<b>Insulation resistance</b>	> 1 GΩ
<b>Approvals</b>	
<b>Approvals</b>	cURus
<b>Cable</b>	
<b>Cable length</b>	5 m
<b>Cable number</b>	332
<b>Cable description</b>	Control cable
<b>Color of jacket</b>	black
<b>Material of outer jacket</b>	PUR
<b>Outer diameter of the cable</b>	9.1 mm

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Number of conductors	15
Cable design	12 x 0.5 mm <sup>2</sup> + 3 x 1.0 mm <sup>2</sup>
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVK: 2 dust covers for unused sockets ZBS: 10 attachable labels

Picture  
Drawing

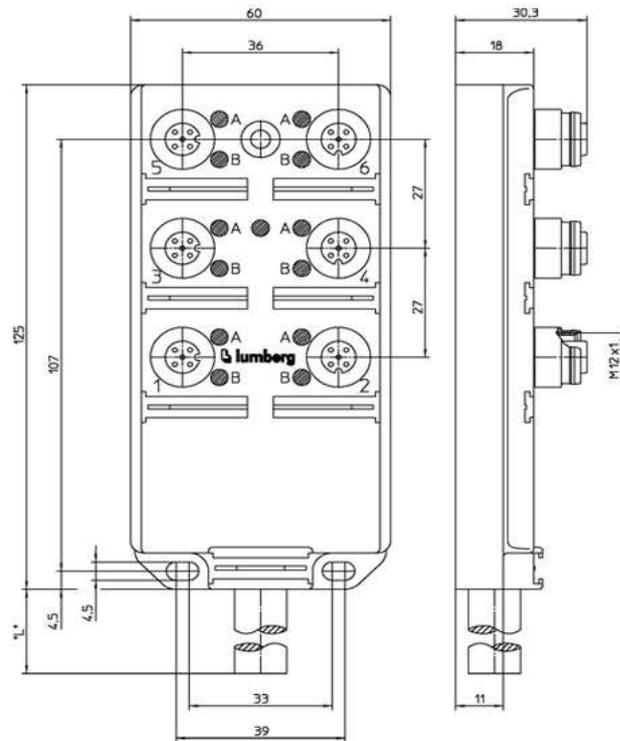

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.