




Product information
M23 Straight Male Connector,
RSUF - RSUF 12-256/20 M
63297

Name	
M23 Straight Male Connector, RSUF	
	
Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 20 Meter.	
Delivery informations	
Availability	available
Product description	
Type	RSUF 12-256/20 M
Order No.	63297
Description	Anschlussleitung, M23-Stecker mit Schraubverschluss, Aussengewinde und angespritztem Kabel, 12-polig, PUR-Kabelmantel, halogenfrei, 20 Meter.
Number of contacts	12
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance, Resistance to torsions
Mechanical data	
Type of plug-in contact	Male connector
Thread	M23
Design of electrical connection	connector M23
LED display present	✘
Environmental conditions	
Environmental temperature	-25 °C ... 80 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	PBT
Contact material	CuZn
Contact material - Surface refinement	pre-nickeled and gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Electrical data	
Rated current I _n	8 A
Nominal voltage	240 V
Rated voltage	250 V
Test voltage	2.5 kV eff./60 s
Insulation resistance	> 10 GΩ
Approvals	
RoHS 2002/95/EG compliant	RoHS 2002/95/EG
Cable	
Cable length	20 m



Picture
Drawing

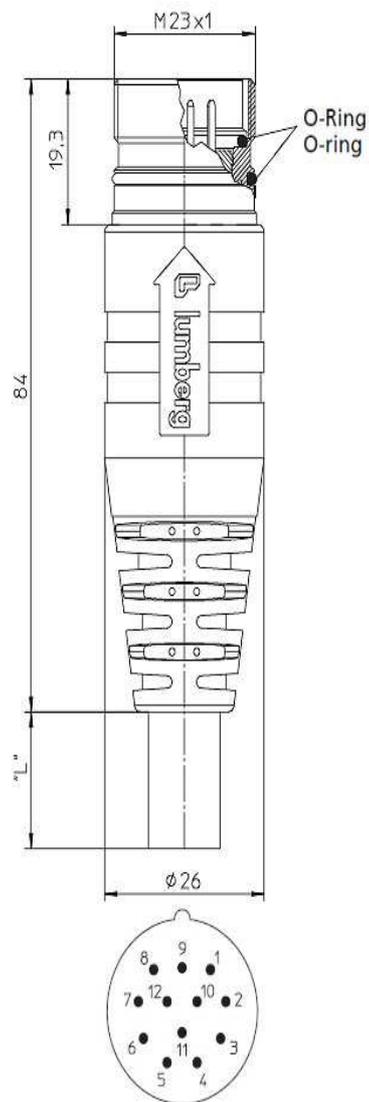

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.