




Product information
ASBSM 8/LED 3
65347

Name	
ASBSM 8/LED 3	
	
Pluggable miniature actuator/sensor distribution box, 8-port version, with LED operation and function indicators, M8 socket, 3-pole, 1 signal per socket, M12 connection for the control cable (type: RKT 12-348/...M).	
Delivery informations	
Availability	available
Product description	
Type	ASBSM 8/LED 3
Order No.	65347
Description	Pluggable miniature actuator/sensor distribution box, 8-port version, with LED operation and function indicators, M8 socket, 3-pole, 1 signal per socket, M12 connection for the control cable (type: RKT 12-348/...M).
Number of contacts	3 (M8)
Version	8 ports
Color of housing	black
Product characteristics	Vibration resistance, Oil resistance
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✓
Environmental conditions	
Environmental temperature	-25 °C ... 70 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	PBT
Contact bearer material	PA, self-extinguishing
Contact material	CuZn (M8), Cu Zn (M12)
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	1.5 A per socket / 1.5 A max. at 40°C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
Scope of delivery and accessories	
Scope of delivery	ZVKM: 2 M8 dust covers for unused sockets ZBR 5/10: attachable labels, 10 pieces

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture
Drawing

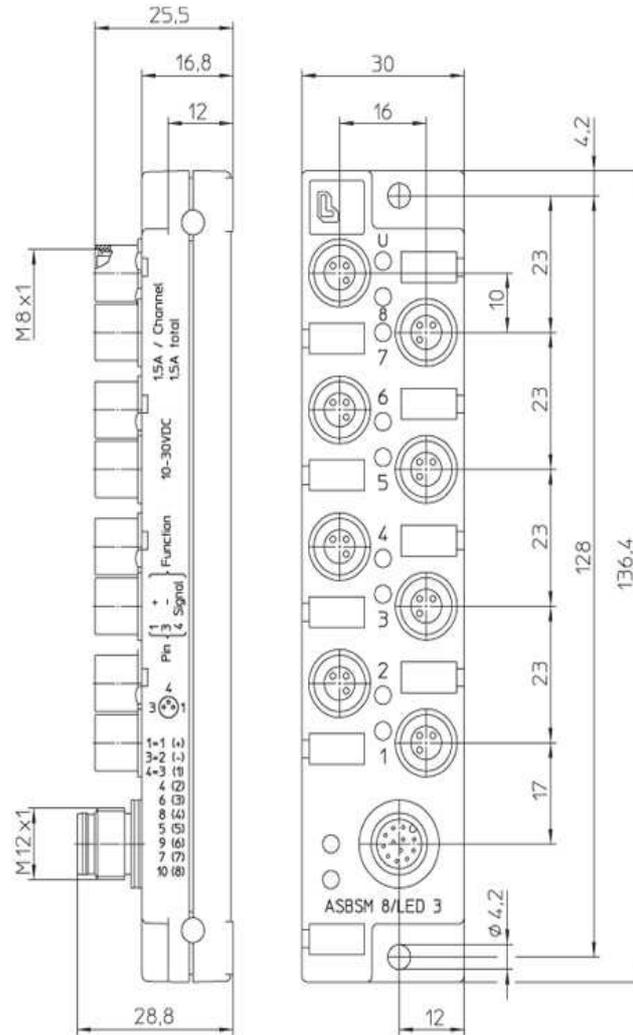

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.