



**Product information**  
**4 ports, 5-15 M - ASBM 4/LED 3-343/15 M**  
**65351**


|                                       |  |
|---------------------------------------|--|
| Name                                  |  |
| Name                                  | 4 ports, 5-15 M  |
| Image                                 |   |
| Description                           | Miniature actuator/sensor distribution box, 4-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 15 meter. |
| Delivery informations                 |  |
| Availability                          | available  |
| Product description                   |  |
| Type                                  | ASBM 4/LED 3-343/15 M  |
| Order No.                             | 65351  |
| Description                           | Miniature actuator/sensor distribution box, 4-port version, with integrated LED operation and function indicators, M8-sockets, 3-pole, fixed control cable, PUR jacket, halogen free, black, 15 meter. |
| Number of contacts                    | 3 (M8)   |
| Version                               | 4 ports  |
| Color of housing                      | black  |
| Product characteristics               | Vibration resistance, Oil resistance, Drag chains suitable   |
| Classification                        |  |
| Belden brand                          | Lumberg-Automation   |
| Mechanical data                       |  |
| Thread                                | M8   |
| LED display present                   | ✓  |
| Environmental conditions              |  |
| Environmental temperature             | -25 °C ... 70 °C   |
| Degree of protection (IP), mounted    | IP67   |
| Pollution degree                      | 3  |
| Materials                             |  |
| Housing material / Molded body        | PBT  |
| Contact bearer material               | PA-GF, self-extinguishing  |
| Contact material                      | CuSn   |
| Contact material - Surface refinement | pre-nickel and 0.8 microns gold-plated   |
| Knurled screw / nut material          | CuZn, nickel-plated  |
| Sealing material                      | FKM  |
| Electrical data                       |  |
| Contact resistance                    | ≤ 5 mΩ   |
| Rated current In                      | 1.5 A per socket / 1.5 A max. at 40°C  |
| Nominal voltage                       | 10 - 30 V DC   |
| Insulation resistance                 | > 1 GΩ   |
| Approvals                             |  |
| Approvals                             | cURus  |
| Cable                                 |  |
| Cable length                          | 15 m   |
| Cable number                          | 343  |
| Cable description                     | Cable for actuator/sensor distribution boxes   |
| Color of jacket                       | black  |
| Material of outer jacket              | PUR  |
| Outer diameter of the cable           | 5.1 mm   |
| Number of conductors                  | 6  |

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



|  |  |
|--|--|
| <b>Cable design</b>                          | 6 x 0.25 mm <sup>2</sup>   |
| <b>Conductor design</b>                      | finest stranded, 32 x Ø 0.1 mm   |
| <b>Flame resistant according to standard</b> | IEC 60332-2, CSA FT-2  |
| <b>Scope of delivery and accessories</b>     |  |
| <b>Scope of delivery</b>                     | ZVKM: 2 M8 dust covers for unused sockets<br>ZBR 5/10: attachable labels, 5 pieces |

Picture  
Drawing

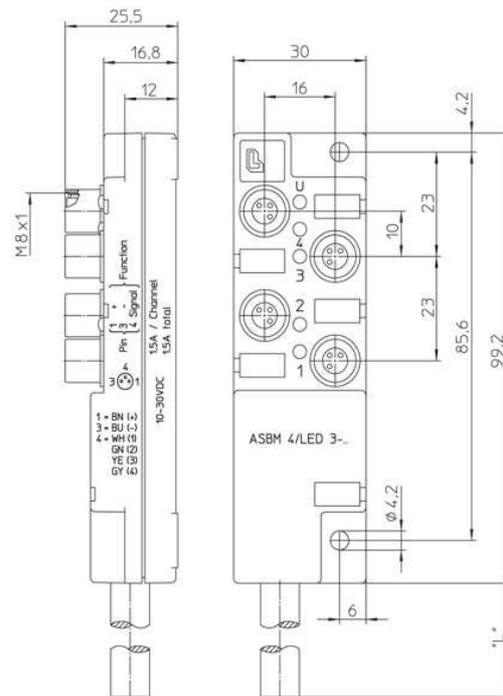

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.