




Product information
N6R BM FA S
933 710-001

| | |
|---|--|
| Name | |
| N6R BM FA S | |
|  | |
| Surface-mounted connector with flange | |
| Delivery informations | |
| Availability | available |
| Product description | |
| Description | Surface-mounted connector with flange |
| Type | N6R BM FA S |
| Order No. | 933 710-001 |
| Type of contact | male |
| Number of contacts | 6 + PE |
| Conductor size | max. 1.5 mm ² |
| Housing Color | grey |
| Technical data | |
| Pin dimensions | 1.6 mm |
| Rated voltage | AC 25 V / DC 50 V |
| Rated current | 5 A |
| Contact resistance | <= 5 mOhm |
| Type of termination | solder, concave pins |
| Suitable cables | 0.5 mm ² to 1.5 mm ² |
| Mounting | flange |
| Material | |
| Contact surface material | Ag |
| Contact bearer material | PET |
| Housing material | Zn Al/Ni |
| Environmental conditions | |
| Protection class (IEC 60529) | IP 65 |
| Temperature range | -40 °C to +90 °C |
| Packing unit | |
| Packaging unit | 10 pieces |
| Scope of delivery and accessories | |
| Scope of delivery | 1 surface-mounted connector, not assembled, in polythene bag with assembly instructions |
| Accessories to order separately | can be plugged into N6R EF S; coding NC 6, order no. 831 002-011 protective cover SHK 2, order no. 733 845-001 |



Picture
Drawing

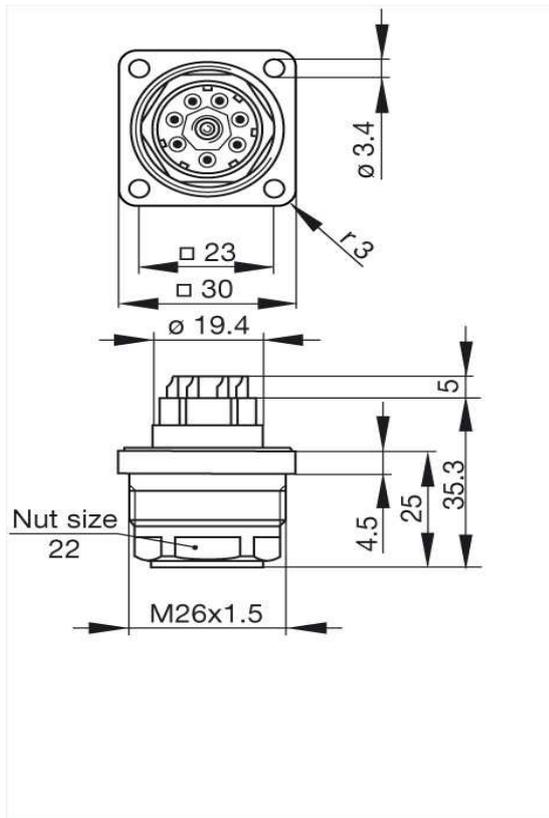

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.