

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Managed Switch 2000, 8 M12 ports 10/100/1000 Mbps, degree of protection: IP65/IP66/IP67, PROFINET Conformance-Class B, Extended temperature range

Your advantages

- Robust IP67 housing
- Easy panel mounting

Commercial data

Item number	1106615
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN126
Product key	DNN126
GTIN	4063151001674
Weight per piece (including packing)	1,444 g
Weight per piece (excluding packing)	1,400 g
Customs tariff number	85176200
Country of origin	DE

FL SWITCH 2708 - Industrial Ethernet Switch




1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Technical data

Dimensions

Dimensional drawing		
Width		60 mm
Height		226 mm
Depth		46 mm
Drill hole spacing		210 mm

Notes

General	Support by phone or on-site (fee is charged)
---------	--

Material specifications

Housing material	Zinc die-cast
------------------	---------------

Mounting

Mounting type	Wall mounting
---------------	---------------

Interfaces

Ethernet	
Connection method	M12 connectors, X-coded
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
Transmission physics	Copper
Transmission length	100 m (per segment)
Signal LEDs	Data receive, link status
No. of channels	8 (M12 ports)

Product properties

Type	Stand-Alone
Product type	Switch
Product family	Managed Switch 2000
MTTF	461.15 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	149.69 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	19.78 Years (SN 29500 standard, temperature 70°C, operating cycle 100%)

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Special properties	Extended temperature range
Signal delay	≥ 1.9 µs (Store-and-Forward mode, 10/100/1000 Mbps, depending on the frame size)
Insulation characteristics	
Protection class	III (VDE 0106)
Switch functions	
Diagnostic functions	RMON History
	LLDP (Link Layer Discovery Protocol)
	SNMP-Traps
	N:1-Portmirroring
	ACD (Address Conflict Detection)
	SysLog
	CRC-Surveillance
Basic functions	Store-and-forward switch, complies with IEEE 802.3
PROFINET conformance class	Conformance-Class B
PROFINET device function	PROFINET device
	Fast Startup
Filter functions	Quality of Service (8 priority classes)
	Class of Service
	DiffServ/DSCP
	Port-Priorisierung
	VLAN (up to 32 VLANs)
	IGMP Snooping/Querier (v1/v2)
	Auto-Query-Port
	Extended Multicast Filtering
IP parameterization	DHCP-Client
	DHCP Option 82 (Relay Agent)
	DHCP server (pool-based, port-based)
	BootP
	DCP (Discovery and Configuration Protocol)
MAC address table	8k
Management	Web-based management (HTTP/HTTPS)
	Role-based user management (LDAP, RADIUS)
	SNMPv1/v2/v3
	Command Line Interface (Telnet, SSH)
Redundancy	MRP (Media Redundancy Protocol)
	RSTP (Rapid Spanning Tree Protocol)
	FRD (Fast Ring Detection)
	Large Tree Support
	LACP (Link Aggregation Control Protocol)
	PROFINET S2 system redundancy
Status and diagnostic indicators	LEDs: US1, US2 (power supply), Fail, 2 LEDs per Ethernet port (Link/Activity and Speed)

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Additional functions	Jumbo frames (max. 9,600 bytes)
	Transmission of MMS and GOOSE (IEC 61850-8-1)
	Transmission of Modbus/TCP
Time synchronization	SNTP (Simple Network Time Protocol)

Security functions

Port security	MAC-based, RADIUS (IEEE 802.1X), MAC Authentication Bypass
Basic functions	Store-and-forward switch, complies with IEEE 802.3

Electrical properties

Local diagnostics	US1/2 Supply voltage US1, US2 Green LED
	FAIL Div. LED red
	LINK Link status Green LED
Maximum power dissipation for nominal condition	6.93 W ($U_S = \min$, $T_{amb} = \max$)
Test section	for one minute 500 V DC
Transmission medium	Copper

Supply

Supply voltage (DC)	24 V DC (redundant)
Supply voltage range	9 V DC ... 57 V DC
Residual ripple	3.6 V _{PP} (within the permitted voltage range)
Max. current consumption	0.77 A ($U_S = \min$, $T_{amb} = \max$)
Typical current consumption	260 mA (at $U_S = 24$ V DC and 25 °C ambient temperature)
Current consumption	260 mA

Connection data

Connection method	M12 connector (A-coded)
-------------------	-------------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 %
Permissible humidity (storage/transport)	5 % ... 95 %
Shock (operation)	30g (EN 60068-2-27)
Vibration (operation)	in acc. with IEC 60068-2-6: 5g, 150 Hz
Air pressure (operation)	79 kPa ... 108 kPa up to 2000 m above mean sea level (Without derating)
Air pressure (storage/transport)	79 kPa ... 108 kPa up to 2000 m above mean sea level (Without derating)

Standards and regulations

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Free from substances that could impair the application of coating	Yes
---	-----

EMC data

Conformance with EMC directives	EN 61000-6-2 EN 61000-4-2 (ESD) Criterion B
	EN 61000-6-2 EN 61000-4-3 (electromagnetic fields) Criterion A
	EN 61000-6-2 EN 61000-4-4 (EFT burst) Criterion A
	EN 61000-6-2 EN 61000-4-5 (surge) Criterion B
	EN 61000-6-2 EN 61000-4-6 (line noise immunity) Criterion A
	EN 61000-6-3 (conducted emissions) Class B
	EN 61000-6-3 (conducted emissions) Class B
Noise immunity	EN 61000-6-2
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	EN 61000-6-3

System properties

Functionality

Basic functions	Store-and-forward switch, complies with IEEE 802.3
-----------------	--

Signaling

Status display	LEDs: US1, US2 (power supply), Fail, 2 LEDs per Ethernet port (Link/Activity and Speed)
----------------	---

FL SWITCH 2708 - Industrial Ethernet Switch




1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Drawings

Schematic diagram

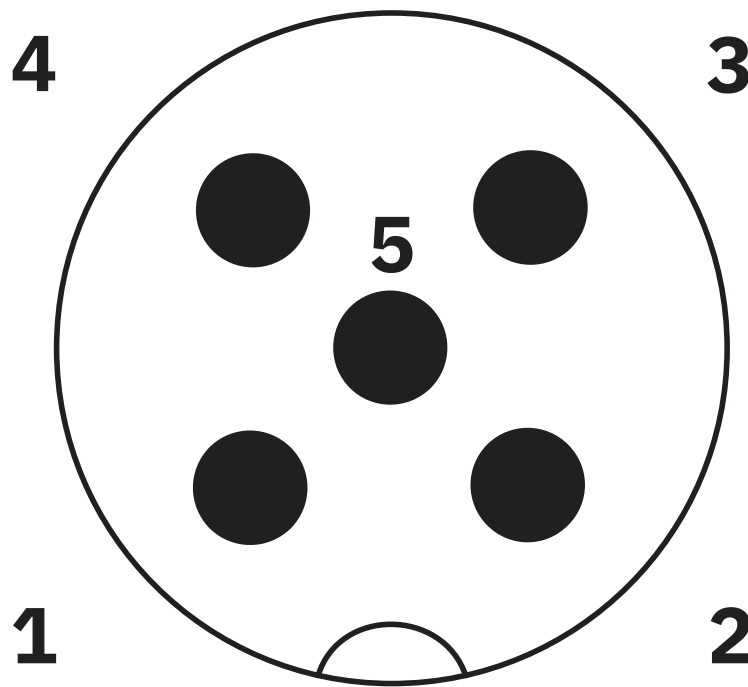

Connection of the supply voltage

PIN 1 Us1

PIN 2 GND


Pin 3 GND

Pin 4 Us2

Pin 5 functional ground

1106615

<https://www.phoenixcontact.com/gb/products/1106615>

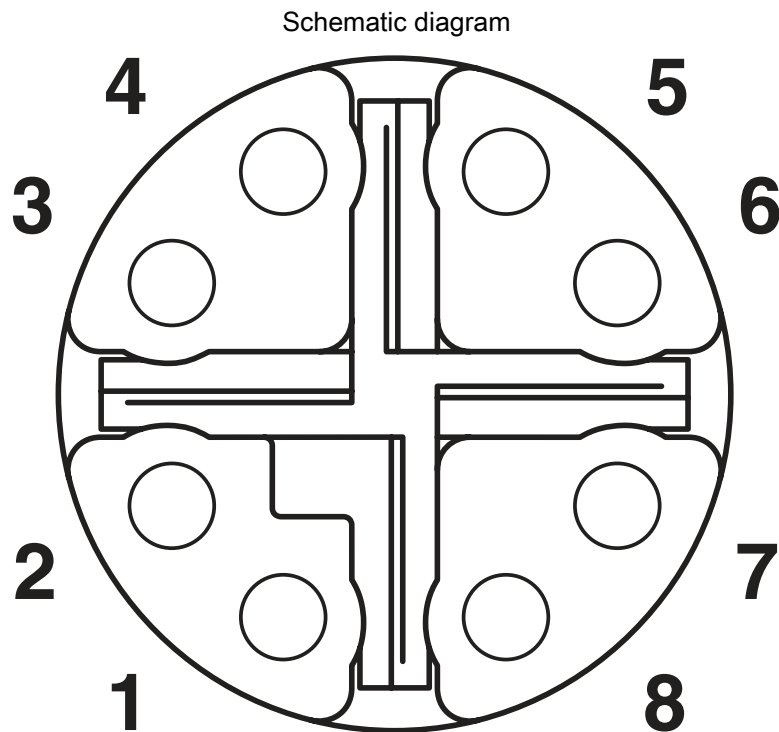

Assignment of the LAN female connector


Pin 1 DB+
Pin 2 DB-
Pin 3 DA+
Pin 4 DA-
Pin 5 DC+
Pin 6 DC-
Pin 7 DD-
Pin 8 DD+

FL SWITCH 2708 - Industrial Ethernet Switch

1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Dimensional drawing

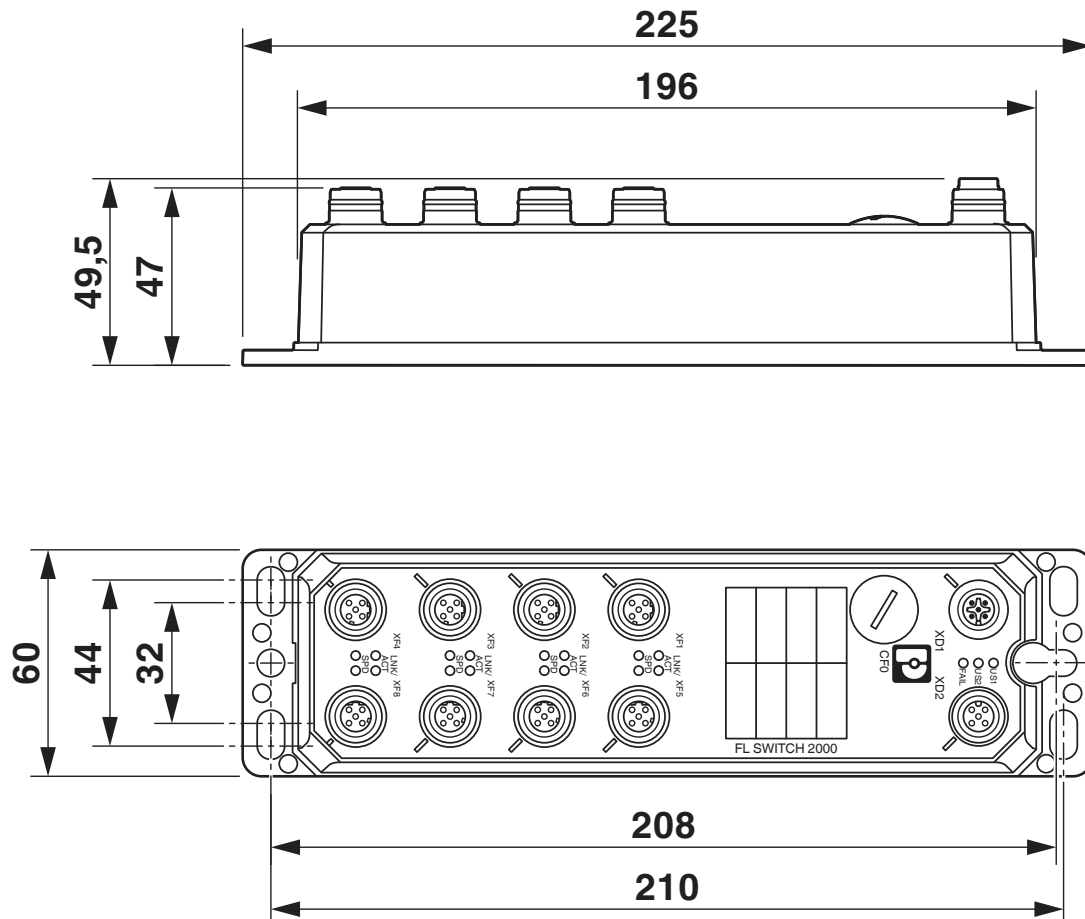

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Approvals

📄 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1106615>



EAC

Approval ID: RU D-DE.GB09.B.00312



cULus Listed

Approval ID: FILE E 238705



CC-Link IE Field

Approval ID: NRT-IF-00058



CC-Link IE Field

Approval ID: NRT-IT-00067

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Classifications

ECLASS

ECLASS-11.0	19170401
ECLASS-12.0	19170401
ECLASS-13.0	19170401

ETIM

ETIM 8.0	EC000734
----------	----------

UNSPSC

UNSPSC 21.0	43222600
-------------	----------

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

Accessories

FL NETWORK MANAGER BASIC - Network management software

2702889

<https://www.phoenixcontact.com/gb/products/2702889>



SNMP-based software for easy commissioning and monitoring of network components such as switches, routers, and WLAN access points

FL MICRO SD FLASH - Program / configuration memory

1129482

<https://www.phoenixcontact.com/gb/products/1129482>



Configuration memory in micro SD format

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

NBC-M12MRX/1,0-94F/M12MRX - Network cable

1080720

<https://www.phoenixcontact.com/gb/products/1080720>



Network cable, Ethernet CAT6_A (10 Gbps) CAT6_A (10 Gbps), 8-position halogen-free, shielded (Advanced Shielding Technology), Plug angled M12, coding: X / IP67, on Plug angled M12, coding: X / IP67, cable length: 1 m

NBC-M12MRX/2,0-94F/M12MRX - Network cable

1080721

<https://www.phoenixcontact.com/gb/products/1080721>



Network cable, Ethernet CAT6_A (10 Gbps) CAT6_A (10 Gbps), 8-position halogen-free, shielded (Advanced Shielding Technology), Plug angled M12, coding: X / IP67, on Plug angled M12, coding: X / IP67, cable length: 2 m

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

NBC-M12MSX/ 1,0-94C/M12MSX - Network cable

1125028

<https://www.phoenixcontact.com/gb/products/1125028>



Network cable, Ethernet CAT5 (1 Gbps) CAT5 (1 Gbps), 8-position, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug straight M12, coding: X / IP67, cable length: 1 m

NBC-M12MSX/1,0-94F/M12MRX - Network cable

1080724

<https://www.phoenixcontact.com/gb/products/1080724>



Network cable, Ethernet CAT6_A (10 Gbps) CAT6_A (10 Gbps), 8-position halogen-free, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug angled M12, coding: X / IP67, cable length: 1 m

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

NBC-M12MSX/2,0-94F/M12MRX - Network cable

1080725

<https://www.phoenixcontact.com/gb/products/1080725>



Network cable, Ethernet CAT6_A (10 Gbps) CAT6_A (10 Gbps), 8-position halogen-free, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug angled M12, coding: X / IP67, cable length: 2 m

NBC-M12MSX/5,0-94F/M12MRX - Network cable

1080726

<https://www.phoenixcontact.com/gb/products/1080726>



Network cable, Ethernet CAT6_A (10 Gbps) CAT6_A (10 Gbps), 8-position halogen-free, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug angled M12, coding: X / IP67, cable length: 5 m

FL SWITCH 2708 - Industrial Ethernet Switch



1106615

<https://www.phoenixcontact.com/gb/products/1106615>

SACC-PO12MSX-8CT-CL SH - Data connector

1021783

<https://www.phoenixcontact.com/gb/products/1021783>



Data connector, Ethernet CAT6_A (10 Gbps), PROFINET CAT6_A (10 Gbps), 8-position, shielded, Plug straight M12 Push-Pull, X, Crimp connection, knurl material: PA 6.6, external cable diameter 6.5 mm ... 10 mm, without crimp contacts

SACC-PO12MSD-4CT-CM SH PN - Data connector

1021830

<https://www.phoenixcontact.com/gb/products/1021830>



Data connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Plug straight M12 Push-Pull, D, Crimp connection, knurl material: PA 6.6, external cable diameter 4.5 mm ... 7.5 mm, without crimp contacts

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk