




ELECTROUSTIC
DISTRIBUTION OF CONNECTIVITY SOLUTIONS

Data connectors

Product overview 2017/2018

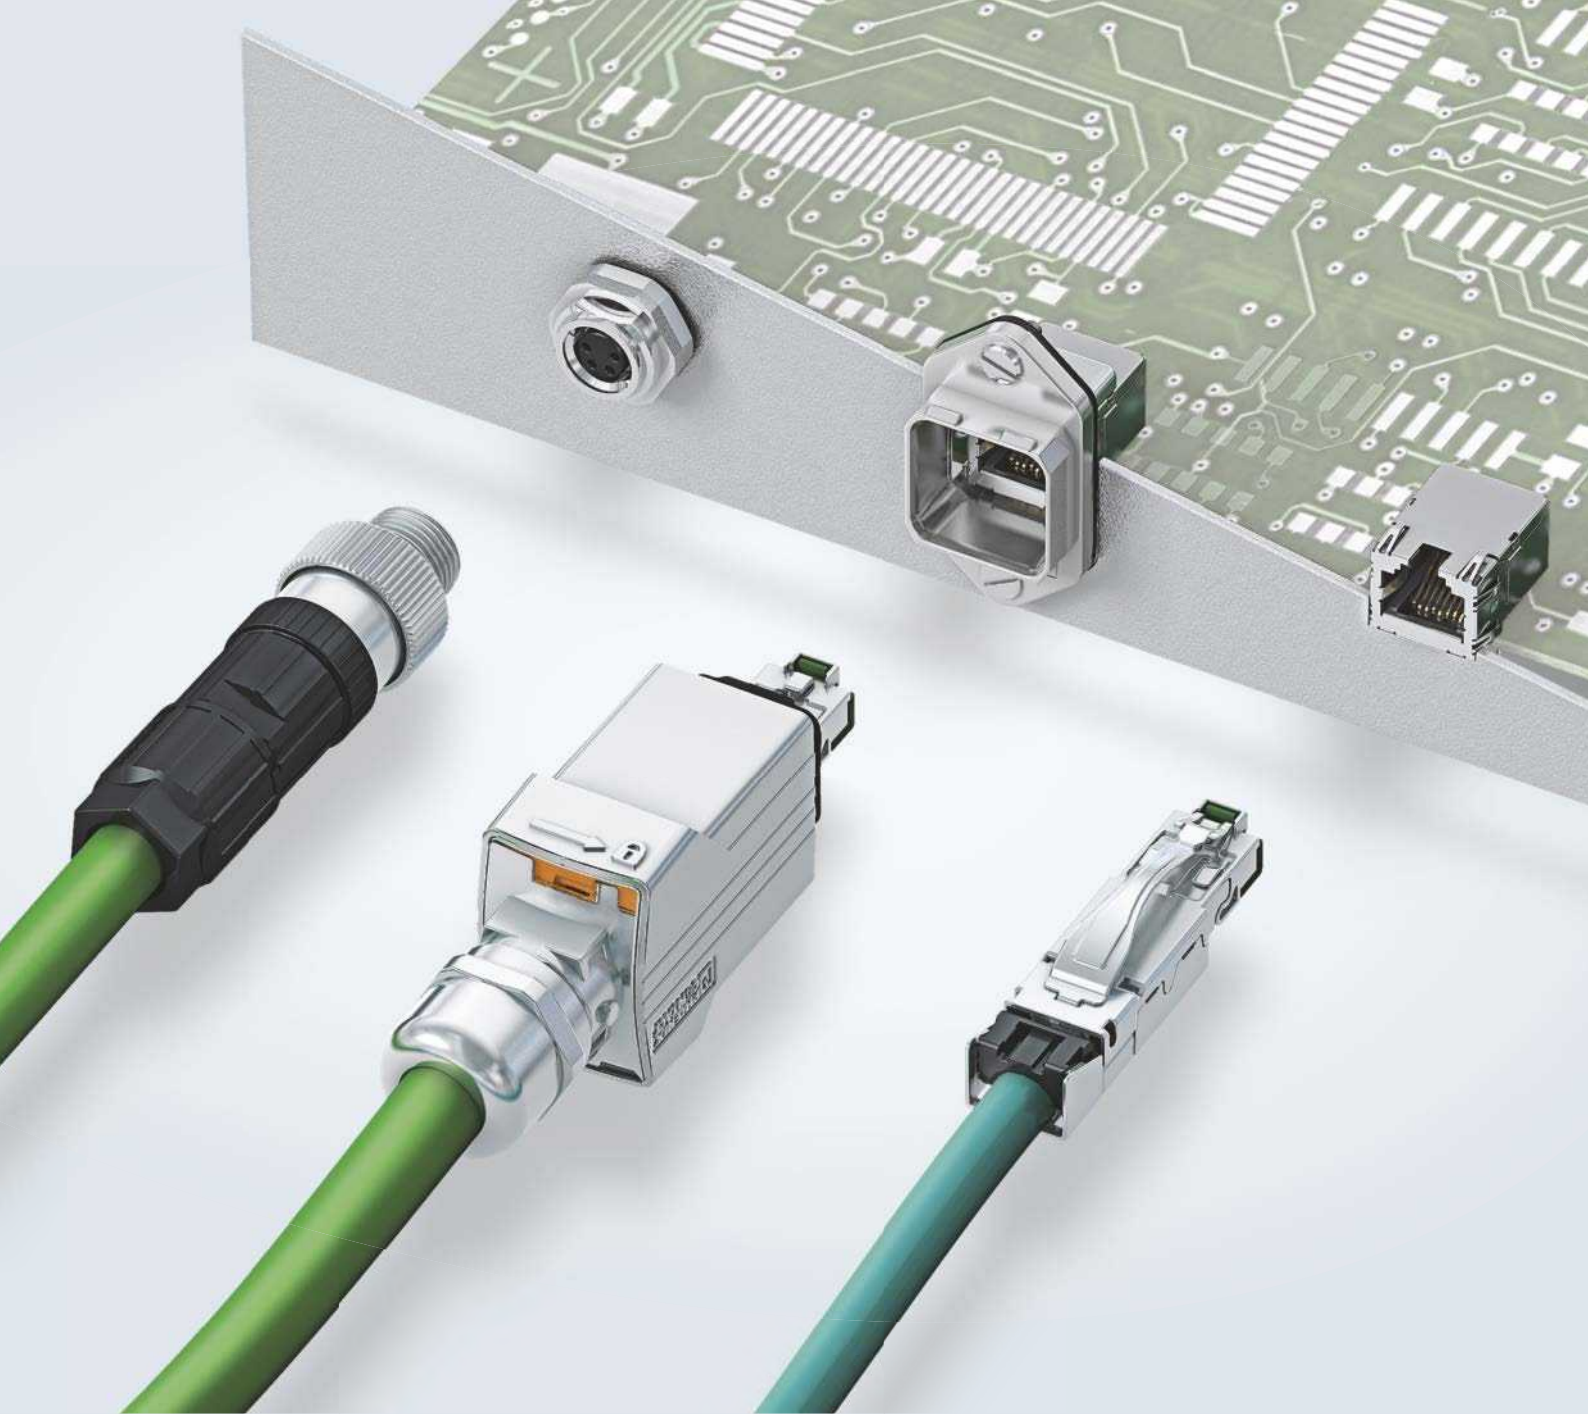

**PHOENIX
CONTACT**
INSPIRING INNOVATIONS

Data connectors for copper and fiber-optic cabling

PLUSCON data is the connector range from Phoenix Contact for secure and reliable data transmission. Benefit from innovative connection technologies and a design that's perfectly suited for industrial applications. The product range includes assembled cables, device connectors, and connectors for field assembly, as well as special, tool-free connector systems for copper-based and fiber-optic-based cabling.

Solutions for copper cabling

- Transmission rates up to 10 Gbps
- Protection class IP20 to IP69K
- Spring, pierce, and IDC insulation displacement connection
- 360° shielding concept
- For all common networks and fieldbuses



Web code: #0297

Solutions for fiber-optic cabling

- Transmission rates up to 40 Gbps
- Protection class IP20, IP65/67, and IP68
- For POF, PCF, and GOF
- For all common fiber-optic interfaces



Web code: #0298



Cu



FO



i Web code:
#0296

Contents

Introduction

Product range overview	4
Copper-based data cabling	6
Fiber-optic-based data cabling	8

Application-specific solutions

Outdoor applications	10
Building cabling	12
Industrial cabling	14
Industrial automation	16

Page navigation	18
-----------------	----

Order overview	20
----------------	----

Customer-specific solutions	48
-----------------------------	----

Find out more with the web code

You can find web codes in this brochure: a hash symbol followed by a four-digit number combination.

i Web code: #1234 (example)

This allows you to access information on our website quickly.

It could not be easier:

1. Go to the Phoenix Contact website
2. Enter # and the number combination in the search field
3. Get more information and product versions

Or use the direct link:
phoenixcontact.net/webcode/#1234

Unique variety for copper and fiber-optic cabling

Create consistent solutions for reliable data transmission up to 40 Gbps with our range of designs, coding, and pin assignments.

Always the right connection



For compact device connection



For flexible on-site connection



For easy cabling

ST

FSMA

SC DUPLEX

LC DUPLEX

SC-RJ

SC-RJ
version 6


SC-RJ
version 14

FSMA

SC

LC

SC-RJ

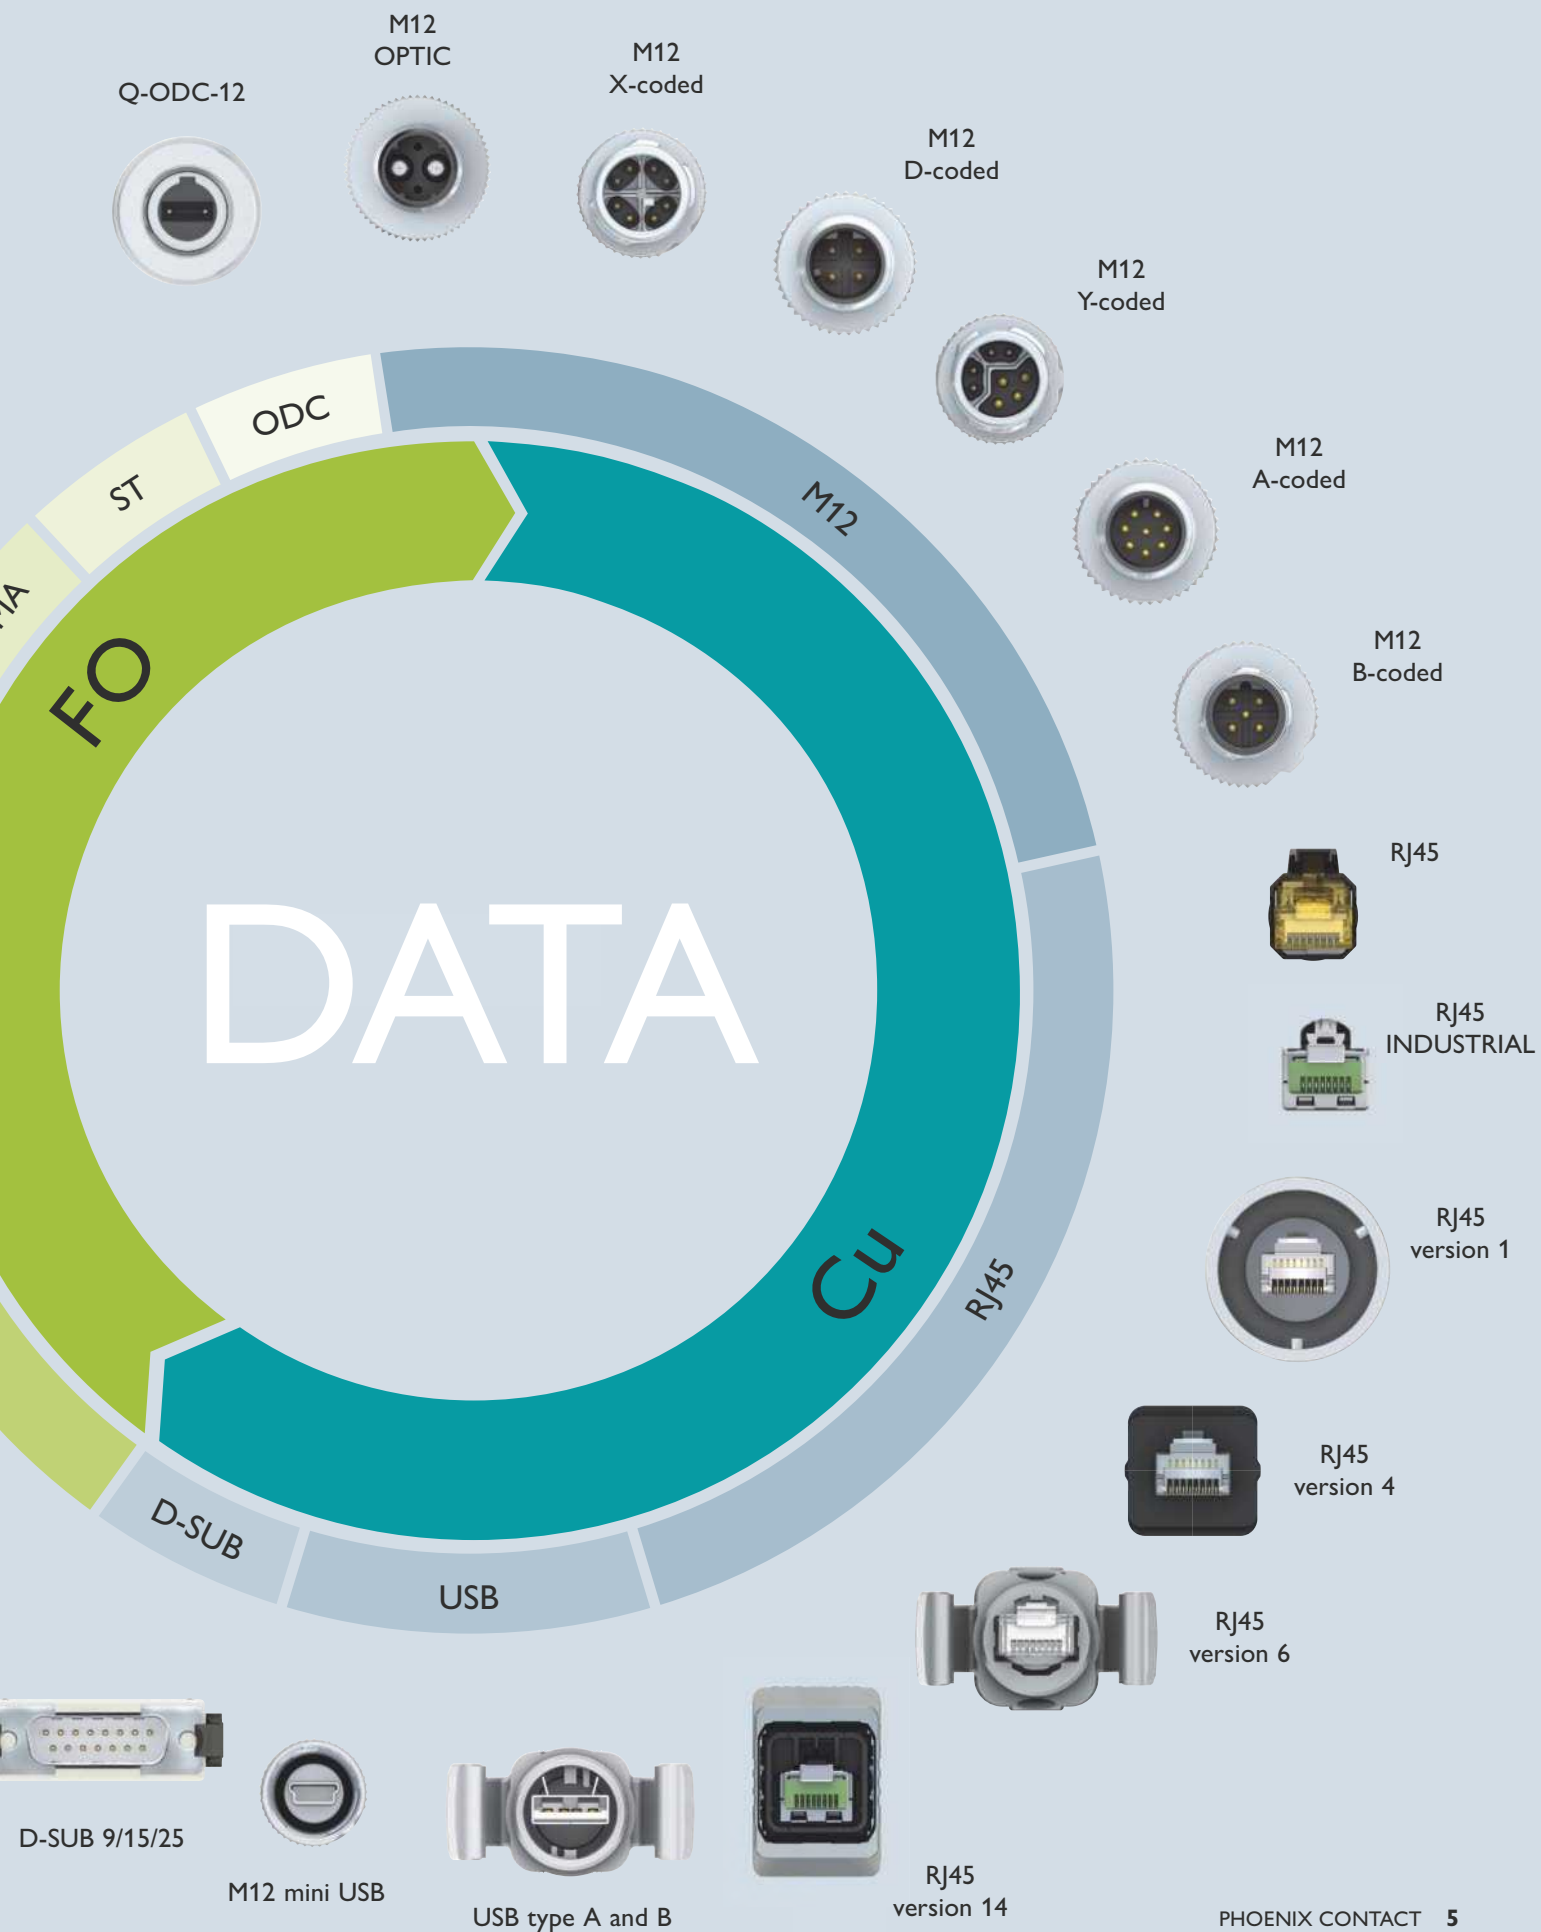

Copper-based data cabling for networks and fieldbuses

Complex automation processes call for high volumes of data at ever-increasing transmission speeds. Benefit now from high-performance connectors and cables for on-site assembly.

Whether it's future-proof high-speed cabling up to 10 Gbps or innovative hybrid cabling – we will find the perfect solution for your automation network.

Main features

- Transmission rates up to 10 Gbps
- Solutions from IP20 to IP69K
- Spring, pierce, and IDC connection
- 360° shielding concepts



Web code:
#0297

EtherNet/IP™

Ethernet



EtherCAT®

PROFI®
NET

SERCOS
the automation bus



PROFI®
BUS

CANopen®

DeviceNet™

CC-Link

Choose a flexible cabling type


Whether for machine building and systems manufacturing, building automation or process automation – with copper-based data connectors from Phoenix Contact, you are opting for a flexible type of cabling that supports a wide range of bus systems:

- Ethernet/IP, Ethernet, VARAN
- EtherCAT®, PROFINET, Sercos®
- INTERBUS, PROFIBUS, CANopen®
- DeviceNet™, CC-Link


Advantages at a glance




Fast assembly without special tools – with IDC and pierce fast connection

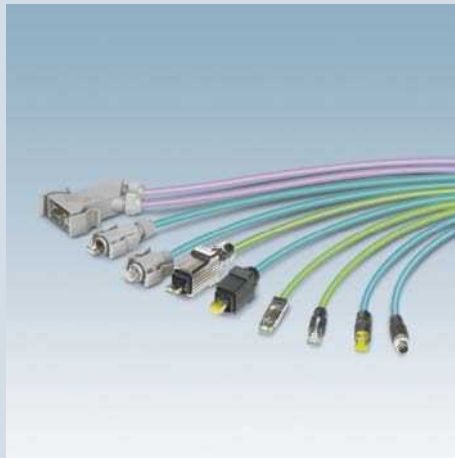

Wide range of connectors from RJ45 to USB and D-SUB to M12

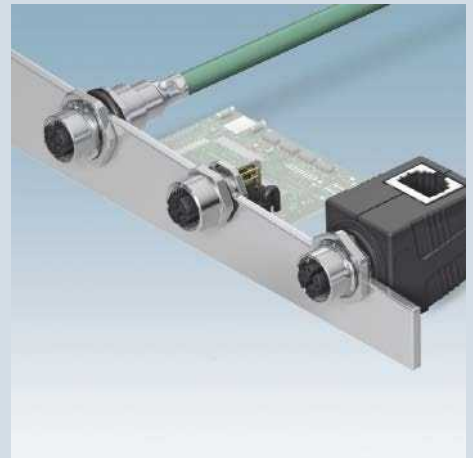

Flexible device connection thanks to versatile housing feed-throughs for devices and control cabinets

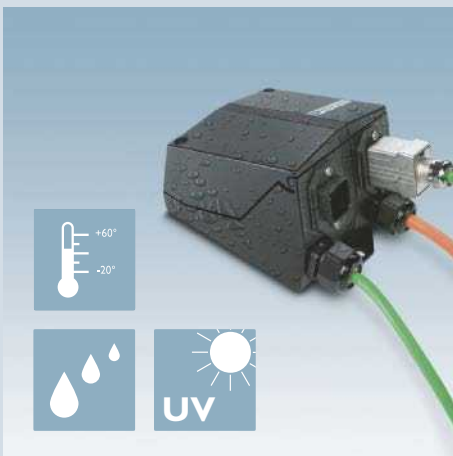

Reliable protection against extreme temperatures, liquids, vibrations, and UV light



Fast data transmission thanks to data rates up to 10 Gbps and components that meet the CAT6A standard



Special shielding concepts with 360° EMC shielding guarantee a high level of resistance to EMC and ESD

Fiber-optic-based data cabling for networks and fieldbuses

High transmission speed, low attenuation, resistance to electromagnetic interference: fiber-optic cables are among the modern transmission media for industrial systems and infrastructure applications. Whatever the fiber type or interface – you can choose the right connection technology from our extensive portfolio.

Main features

- Transmission rates up to 40 Gbps
- Solutions from IP20 to IP65/IP67 and IP68
- For all common fiber types
- Maximum protection against the effects of EMC and ESD



EtherNet/IP™

Ethernet

EtherCAT®

PROFI®
NET

sercos
the automation bus

INTERBUS

PROFI®
BUS

CANopen®

DeviceNet™

Modbus

Choose the right fiber type for your application

- POF (polymer optical fiber) for short transmission paths up to 100 m and maximum data rates of up to 100 Mbps
- PCF (polymer-clad fiber) for medium-length transmission paths up to 500 m and maximum data rates of up to 1 Gbps
- GOF (glass optical fiber) multimode for long transmission paths up to 550 m at 10 Gbps
- GOF single mode for up to 50 km and data rates of up to 40 Gbps

Advantages at a glance



Wide choice of versions from SC-RJ, LC, SC, FSMA to ST, plus POF, PCF, and GOF fiber types



Extensive range of cables for all applications, networks, and standard interfaces



Fast assembly in the field using professional tools



Reliable protection against extreme temperatures, liquids, and UV light



High-quality UL-listed patch cable up to 40 Gbps



Push-pull ADVANCE locking technology protects against unintentional pulling

Data connectors for outdoor applications

High requirements are placed on components used for outdoor data transmission, in fields such as telecommunications and renewable energies. Phoenix Contact offers special connectors for outdoor applications. These can withstand aggressive environmental conditions such as large differences in temperature, humidity, UV rays, and vibrations.

Main features

- Connectors for outdoor applications with IP65/67/69K protection
- Fiber-optic connectors with a robust design
- High-quality and UV-resistant connectors and cables
- Robust connectors made of 1.4404 stainless steel
- Data rates up to 40 Gbps
- GL-approval for offshore applications



i Web code:
#0321






Advantages at a glance



Corrosion-resistant materials such as 1.4404 stainless steel guarantee reliable operation in extreme environmental conditions



High IP protection classes guarantee reliable protection against external weather conditions

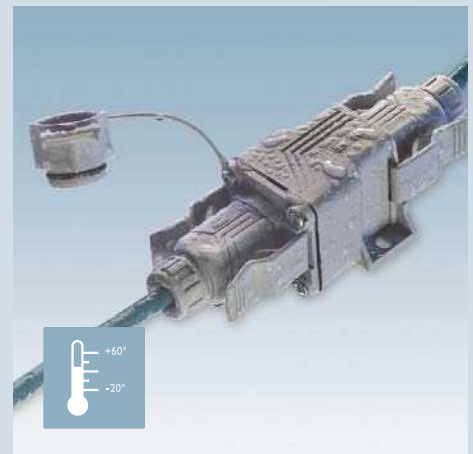

Guaranteed durability through the use of high-quality materials and intensive testing processes

Data connectors for building cabling

Phoenix Contact offers an extensive and future-oriented product range for modern building cabling.

Our patch cables and patch fields allow you to install flexible and failsafe cabling.

Main features

- Consistent cabling systems for 19" technology
- Connection technology for either copper or fiber-optic cabling
- Connection solutions for indoor and outdoor applications
- Consistent range of data connectors, right up to active components for building cabling
- GHMT-certified products



i Web code:
#0322






Comfort, flexibility, and versatility are the requirements for modern building cabling. Completely pre-assembled splice boxes with removable front drawer, high-quality individual parts, and individual measurement logs also save time during installations.



Advantages at a glance

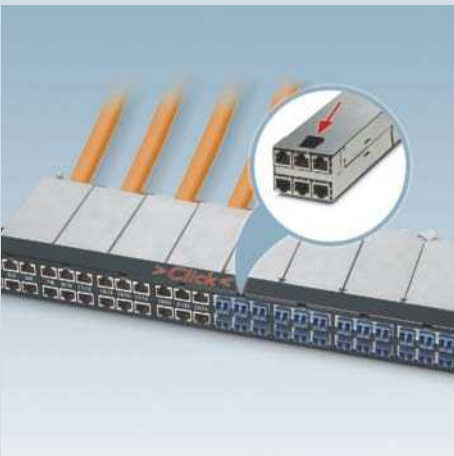

Fast installation of 19" components thanks to the Plug and Play principle and pre-assembled modules



Individual cabling solutions for any area of application



Shielded CAT6_A cable connectors for structured building cabling for easy assembly

Data connectors for industrial control cabinet cabling

When it comes to special requirements for industrial cabling, especially with the focus on Industrie 4.0, Phoenix Contact offers reliable connection solutions.

Select the fiber optic cable or copper component that's right for your data transmission system and cabling solutions for Ethernet and PROFINET applications.

Main features

- Consistent product range for data transmission up to 10 Gbps (CAT6A)
- Connectors for assembly without special tools
- Individual solutions can be implemented for copper-based data cabling
- SPEEDCON fast-locking technology for easy insertion and removal in the field
- Individual solutions can be implemented for fiber optic-based data cabling



i Web code:
#0324






Advantages at a glance



Fast assembly without additional tools, thanks to a QUICKON IDC fast connection

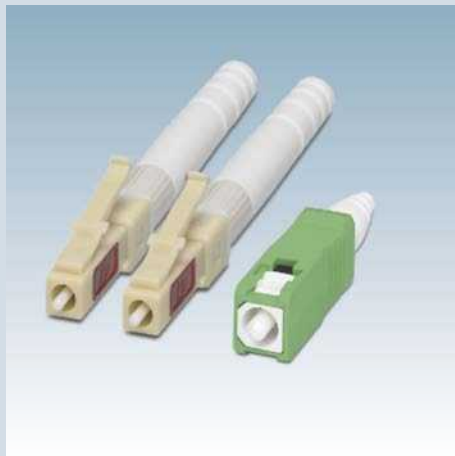

Highly flexible thanks to rapid field connection using cleve technology



Shock and vibration-resistant connectors ensure permanently secure connections

Data connectors for industrial automation in the field

Special shielding concepts and torsion-resistant components are essential for the reliable operation of robots and conveying systems.

Put your trust in the reliable and consistent product range from Phoenix Contact for fault-free data transmission.

Main features

- Tested connection technology according to the PROFINET standard
- Maximum immunity to EMC and ESD interference thanks to consistent shielding
- Convenient push-pull connection system for data and 24 V and 16 A power
- Individual solutions for copper and fiber-optic cabling
- Connectors for assembly and pre-assembled cables available



i Web code:
#0323



The EMC-protected installation concept facilitates easy and EMC-safe cabling. This is achieved with hose packs from the control cabinet to the robot head and is based on the cabling guidelines for PROFINET.



Advantages at a glance



Components that are resistant to welding beads for use with robots



Consistent shielding concept for protection against EMC and ESD interference



Guaranteed torsion resistance thanks to the special cable design

Page navigation – data connectors

		Copper		
		Data		
		100 Mbps	1 Gbps	10 Gbps
IP20				
	Connectors	20		
	Panel mounting frames	20		
	Socket inserts	20		
	Patch cables	30	32 / 36	34
	Tool sets			
IP20 distributor				
	Modular distribution panels	22		
	Patch panels	22		
	Junction boxes	22		
	Socket inserts	22		
	Splice boxes			
Version 14				
	Connectors	24		
	Panel mounting frames	24		
	Socket inserts	24		
	Couplings		24	
	Distributors			
	Multi-ports			24
	Terminal outlets		24	
	Patch cables	30	32	34
	Tool sets			
Version 6				
	Connectors	28		
	Panel mounting frames	28		
	Socket inserts	28		
	Couplings	28		
	Terminal outlets		28	
	Patch cables		32	34
	Tool sets			
D-SUB				
	Connectors			
	Socket inserts			
	Sleeve housing			
	Panel mounting frames			
USB				
	Patch cables	37		
	Panel mounting frames	37		
	Socket inserts	37		
M12				
	Connectors	40		
	Device connectors	41		
	Patch cables	30	32	34
	Couplings			

			FO		
Signal	Power		Data		
			POF	PCF	GOF
				44	
				44	
					46 / 47
				44 / 45	
					
				44	
				44	
				44	45
	26			42	
	26			42	
	26				
	26			42	
	26			42	
	26			42	
	26				
				42	
			42	42	
				42	
				42	
				42	
				42	
			42	42	
38	38				
38	38				
38	38				
38	38				
					
40					
41				43	
				43	
				43	

RJ45, connectors, and sockets, IP20

i Web code: #0330

Connectors

							
Straight cable outlet							
Ethernet					PROFINET	Ethernet/ PROFINET	PROFINET
Plastic, gray	Plastic, green	Plastic, black	Plastic, gray	Plastic, black	Plastic, gray		
AWG 24 ... 27	AWG 24 ... 27	AWG 24 ... 26	AWG 23 ... 26		AWG 22	AWG 26 ... 24	AWG 23 ... 22

Connectors with IDC fast connection

Up to 100 Mbps CAT5						1658435		
Up to 1 Gbps CAT5				1656725	1658008		1421607	1421126
Up to 10 Gbps CAT6 _A			1419001					

Connectors with crimp connection

Up to 1 Gbps CAT5	1414382*	1414400*						
Up to 10 Gbps CAT6 _A	1414395*	1414402*						

Panel mounting frames, unequipped

Panel mounting frame for Keystone modules								
--	--	--	--	--	--	--	--	--

Keystone modules

Cable module, up to 10 Gbps CAT6 _A								
Coupler module up to 1 Gbps, CAT5								
Coupler module up to 1 Gbps, CAT6								

* Tool 1653265 required



IDC fast connection – quick and easy assembly without special tools

RJ45, distributors, and modules, IP20

i Web code: #0330

Modular distribution panels



19" mounting

Modular distribution panels

19" mounting frame, gray	1407986			
19" mounting frame, black	1409140			
RJ45 module, 6 x RJ45 to 6 x RJ45, CAT6 _A		1407995		
Blind module for 19" mounting frame		1407988		
19" patch bay with plastic brackets			1407994	
19" patch bay with metal brackets, gray			1409283	
19" patch bay with metal brackets, black			1409284	

Patch panel for Freenet modules

16 installation slots, unequipped				1652994
-----------------------------------	--	--	--	---------

Patch panels for socket inserts, adapter-free

24 installation slots, unequipped, gray				
24 installation slots, unequipped, black				

Patch panels for DIN rails

Cable module, up to 10 Gbps CAT6 _A				
Coupler module, up to 1 Gbps CAT6				

Junction boxes for Freenet modules

Surface mounted, unequipped, for 2 modules				
Surface mounted, unequipped, for 6 modules				
Flush mounted, unequipped, for 2 modules				

Socket insert, adapter-free

Cable module, up to 10 Gbps CAT6 _A				
---	--	--	--	--

Freenet modules

Cable connection module, CAT6 _A				
Cable connection module, CAT5				
Coupler module, CAT6				

Patch panels		Junction boxes			Socket inserts			
New						New		
	DIN rail mounting	Surface mounting		Flush mounting	Cable modules	Coupler modules		

RJ45, push-pull interlocking (V14), IP65/67

i Web code: #0325

Connectors

New		New		New			
							
Zinc die-cast							
Straight outlet		Angled outlet at bottom		Angled outlet at top		Straight outlet	
AWG 26 ... 24	AWG 23 ... 22	AWG 26 ... 24	AWG 23 ... 22	AWG 26 ... 24	AWG 23 ... 22	AWG 26 ... 24	AWG 23 ... 22

Connectors with IDC fast connection

Up to 100 Mbps CAT5								1403366
Up to 1 Gbps CAT5	1422661	1422664	1422662	1422665	1422663	1422667	1403367	

Connectors with crimp connection

Up to 10 Gbps CAT6 _A							1422108*	
---------------------------------	--	--	--	--	--	--	----------	--

Panel mounting frames, equipped

Panel mounting frame with socket insert, CAT6 _A , cable connection								
Panel mounting frame with socket insert, CAT6 _A , coupler module								

Panel mounting frames, unequipped

Panel mounting frame for PCB modules								
Panel mounting frame for Freenet modules								

Socket inserts for panel mounting frames

Freenet cable module, up to 1 Gbps CAT5								
Freenet cable module, up to 10 Gbps CAT6 _A								
Freenet coupler module, up to 1 Gbps, CAT6								
PCB module, up to 10 Gbps CAT6 _A								

Couplings, multi-ports, and terminal outlets

Coupling, 1 x RJ45, 1 x RJ45								
Multi-port cable module, 1 x RJ45								
Multi-port cable module, 1 x RJ45, 1 x power								
Multi-port coupler module, 1 x RJ45, 1 x RJ45								
Multi-port coupler module, 2 x RJ45, 2 x power								
Terminal outlet, 2 x RJ45								
Terminal outlet, 1 x RJ45, 1 x power								

* Tool 1653265 required

Panel mounting frames			Socket inserts			Couplings	Multi-ports	Terminal outlets
New	New		New	New				
								
Zinc die-cast							Aluminum die-cast	
Square panel cutout		Round panel cutout	Cable modules	Coupler modules	PCB modules			
1413961								
1413962								
	1413963							
		1405222						
			1652936					
			1418984					
				1419022				
					1420401			
						1405183		
							1403678	
							1403682	
							1403685	
							1406395	
								1404281
								1404333

Power, push-pull interlocking (V14), IP65/67

i Web code: #0341

Connectors	Panel mounting frames for conductor connection		Panel mounting frames for PCB mounting	
New				
				
Zinc die-cast	Round panel cutout	Square panel cutout	Square panel cutout	Contact insert
AWG 18 ... 13				

Connectors with spring-cage connection

Cable diameter 6.5 mm ... 9 mm	1421783				
Cable diameter 9 mm ... 13 mm	1421785				

Panel mounting frames with spring-cage connection

Fixed coding		1405248	1608249		
Variable coding		1409036	1408235		

Panel mounting frames for PCB modules

Panel mounting frame, unequipped				1608087	
Solder connection, angled					1657915
Solder connection, straight					1609565

Distributors, multi-ports, and terminal outlets

Distributor, 2 x push-pull / 1 x push-pull					
Distributor, 2 x push-pull / 1 x 7/8" connector					
Distributor, 2 x push-pull / 2 x push-pull					
Multi-port cable module, 1 x power					
Multi-port cable module, 1 x power / 1 x data					
Multi-port coupler module, 1 x power / 1 x power					
Multi-port coupler module, 2 x power, 2 x RJ45					
Terminal outlet, 1 x power, 1 x data					

RJ45, snap-in locking (V6), IP65/67

i Web code: #0329

Connectors



Plastic, gray

Plastic, black

AWG
23 ... 26

AWG
24 ... 27

AWG
23 ... 26

AWG
24 ... 27

Connectors with IDC fast connection

Up to 1 Gbps CAT5

1656990

1658493

Connectors with crimp connection

Up to 1 Gbps CAT5

1414383*

1414408*

Up to 10 Gbps CAT6_A

1414406*

1414410*

Panel mounting frames, unequipped

Panel mounting frame for
Keystone modules

Panel mounting frame for
Freenet modules

Panel mounting frame for
PCB modules

Keystone modules

Coupler module, up to 1 Gbps,
CAT5

Coupler module, up to 1 Gbps,
CAT6

Freenet modules

Cable module, up to 1 Gbps
CAT5

Cable module, up to 10 Gbps
CAT6_A

Coupler module up to 1 Gbps,
CAT6

PCB modules

Straight, CAT6

Angled, CAT5

Angled, CAT6

Couplings and terminal outlets

Coupling, 1 x RJ45/RJ45

Terminal outlet, 2 x RJ45

* Tool 1653265 required

Panel mounting frames				Socket inserts			Couplings		Terminal outlets
				New 	New 				
Plastic, gray	Plastic, black	Plastic, gray	Plastic, black	Metal			Plastic, gray	Plastic, black	Aluminum die-cast
Round panel cutout		Square panel cutout		Cable modules	Coupler modules	PCB modules			
1689844	1658053	1689080	1658642						
1653744	1658668								
		1689446	1658655						
					1689064				
					1653155				
				1652936					
				1418984					
					1419022				
						1653090			
						1688586			
						1653087			
							1689268	1658684	
									1404278

RJ45, patch cables for PROFINET, up to 100 Mbps

i Web code: #0326

		IP20 cables		
		RJ45 connector, straight	RJ45 connector, angled	RJ45 connector, version 14, metal
IP20 cables	Open cable end			
		Variable		
	RJ45 connector, straight			
		Variable		
IP20 cables	RJ45 connector, angled			
		Variable		
	RJ45 connector, version 14, metal			
		Variable		
IP65/67 cables	RJ45 connector, version 14, plastic			
		Variable		
	M12 connector, SPEEDCON, straight			
		Variable		
IP65/67 cables	M12 connector, SPEEDCON, angled			
		Variable		

PROFINET cable, type 93B



The PROFINET cable type 93B is designed for flexible installation and is oil-resistant up to a degree. It is designed for outdoor use, as the cable is UV-resistant for 1200 seconds according to UL 1581. The transmission properties meet CAT5.

Outer sheath material: PVC
 Minimum bending radius: 7 x D
 Tested at: +20°C ... +25°C

IP65/67 cables

RJ45 connector, version 14, plastic	M12 connector, SPEEDCON, straight	M12 connector, SPEEDCON, angled	M12 socket, SPEEDCON, straight	M12 socket, SPEEDCON, angled	M12 flush-type socket, rear mounting
					
					Cable length
1411860	1408640	1408633	1408623	1408615	1 m 1437779
					2 m 1437782
					5 m 1437795
1411864	1408639	1408632	1408622	1408613	0.5 m 1404367
					1 m 1404368
					5 m 1404369
	1408638	1408631	1408621	1408612	
	1408636	1408628	1408619	1408610	
1411867	1408635	1408626	1408618	1408609	
1408635	1408634	1408625	1408617	1408608	
1408609	1408608	1408624	1408616	1408607	

RJ45, patch cables for Ethernet, up to 1 Gbps

i Web code: #0327

		IP20 cables		
		RJ45 connector	RJ45 connector, version 6	RJ45 connector, version 14, metal
IP20 cables	Open cable end			
		Variable	1411838	1411839
	RJ45 connector			
IP65/67 cables		Variable	1411842	1411843
	RJ45 connector, version 6			
		Variable	1411843	1411846
	RJ45 connector, version 14, metal			
		Variable	1411844	1411847
	RJ45 connector, version 14, plastic			
		Variable	1411845	
	M12 connector, SPEEDCON, straight			
		Variable	1408681	1408679
	M12 connector, SPEEDCON, angled			
		Variable	1408674	1408671

Ethernet cable, type 94B



CAT5

The Ethernet cable type 94B is designed for flexible installation. The cable is resistant to oil and chemicals and is flame-retardant. Its transmission properties meet CAT5.

Outer sheath material: PUR
Minimum bending radius: 5 x D

IP65/67 cables

RJ45 connector, version 14, plastic	M12 connector, SPEEDCON, straight	M12 connector, SPEEDCON, angled	M12 socket, SPEEDCON, straight	M12 socket, SPEEDCON, angled	M12 flush-type socket, rear mounting	
						
					Cable length	
1411841	1408682	1408675	1408665	1408657	5 m	1407877
1411845	1408681	1408674	1408664	1408655	5 m	1412082
	1408679	1408671	1408662	1408653	5 m	1412231
	1408678	1408670	1408661	1408652	5 m	1412503
1411848	1408677	1408668	1408660	1408651	5 m	1412590
1408677	1408676	1408667	1408659	1408650		
1408668	1408667	1408666	1408658	1408649		

RJ45, patch cables for Ethernet, up to 10 Gbps

i Web code: #0328

			IP20 cables	
			RJ45 connector, plastic	RJ45 connector, version 6, plastic
IP20 cables	Open cable end	Cable length		
		Variable	1411853	1415639
	RJ45 connector			
IP65/67 cables		Variable	1411854	1414321
	RJ45 connector, version 6, plastic			
		Variable	1414321	1414322
	RJ45 connector, version 14, metal			
		Variable	1411855	
	RJ45 connector, version 14, plastic			
		Variable	1411856	
	M12 connector, SPEEDCON			
		Variable		
CAT6 _A				

Ethernet cable, type 94F



The Ethernet cable type 94F is designed for flexible laying. The cable is resistant to oil and chemicals and is flame-retardant. It is also halogen-free and its transmission properties meet CAT6_A.

Outer sheath material:

PUR

Minimum bending radius:

10 × D

IP65/67 cables

RJ45 connector, version 14, metal	RJ45 connector, version 14, plastic	M12 connector, SPEEDCON	M12 flush-type socket, rear mounting	
				
		CAT6 _A	Cable length	CAT6 _A
1415637	1415638	1408648	1 m	1424148
			2 m	1424151
			5 m	1424164
1411855	1411856	1408647		
1414323		1408646		
	1414324	1408645		
		1408644		

RJ45, patch cables, accessories, IP20

i Web code: #0331

Office patch cables

Assembled patch cables, IP20



Outer sheath material: LSFROH, outside diameter: 5.5 mm, material of single wires: Cu litz wire, single wires per module: 8, cross section of single wires: 0.14 mm²

Ethernet	CAT5, S/UTP shielding	CAT6, S/FTP shielding
0.3 m	2832250	2891181
0.5 m	2832263	2891288
1 m	2832276	2891385
1.5 m	2832221	2891482
2 m	2832289	2891589
3 m	2832292	2891686
5 m	2832580	2891783
7.5 m	2832616	2891880
10 m	2832629	2891877
12.5 m		2891369
15 m		2891372
20 m		2891576

Accessories for office patch cables

Accessories for sockets

Color coding		Security element	Color coding	Safe clip	Security frame	Dust protection cap
For easy visual color coding		Self-locking, against unintentional release, lockable	For easy visual color coding of the security elements	Self-locking, against unintentional release	For SFN switches and patch fields, including key	For RJ45 sockets
Black	2891194	Lockable element 2891424	Black	2891136	Green	2891615
Blue	2891291	Key 2891521	Blue	2891233	Red	2891712
Brown	2891495		Orange	2891330	White	2891819
Yellow	2891592		Yellow	2891437	Lock	2891220
Gray	2891699		Turquoise	2891534	Key	2891327
Green	2891796		Green	2891631		
Red	2891893		Red	2891738		
Violet	2891990		Violet	2891835		

USB, patch cables, panel mounting frames

i Web code: #0335

		Assembled USB cables, type A	
		IP20	IP67
		 	 
Open cable end	Length		
	1 m	1655771	1655742
	2 m	1655784	1655755
	5 m	1655797	1655768
USB connector type B			
 	1 m	1654853	
	2 m	1653935	1653896
	5 m	1653948	1653906
USB connector type B			
 	2 m	1653919	1653870
	5 m	1653922	1653883
M12 mini USB, SPEEDCON			
	1 m	1420168	
	2 m	1420171	
	4 m	1420184	


i Web code: #0335

IP65/67 panel mounting frames			
			
Plastic, gray			Zinc die-cast
Round panel cutout		Pin connector	Solder connection
Panel mounting frames, equipped			
Panel mounting frame with USB socket A/socket B	1411904		
Panel mounting frame with USB socket B/socket A	1411905		
Panel mounting frames, unequipped			
Panel mounting frame for Freenet modules		1653744	
Freenet modules			
Type A USB socket to post connector			1653854
Type B USB socket to post connector			1653867
Panel-mount connector			
M12 with USB Mini B, with straight solder connection			1440711


D-SUB, connectors, panel mounting frames

i Web code: #0340


Housing size 1



Housing size 2



Housing size 3



Contact inserts

		Connection technology	Contact arrangement	Housing size	Pin	Socket
Signal		Screw connection	9 x signal	1	1688379	1688395
			15 x signal	2	1688078	1688094
			25 x signal	3	1689789	1689776
		Solder cup	9 x signal	1	1688793	1688803
			15 x signal	2	1688874	1688887
			25 x signal	3	1689899	1689909
		Straight solder pin	9 x signal	1	1418717	1418726
			15 x signal	2	1418718	1418728
			25 x signal	3	1418725	1418729
		Angled solder pin	9 x signal	1	1688382	1688405
			15 x signal	2	1688081	1688120
			25 x signal	3	1689873	1689886
		Contact carrier, without contacts	9 x signal	1	1688858	1688861
			15 x signal	2	1688939	1688942
			25 x signal	3	1689954	1689967
		Flat-ribbon cable	9 x signal	1	1688816	1688829
			15 x signal	2	1688890	1688900
			25 x signal	3	1689912	1689925
		Flat-ribbon cable 4-40 UNC thread	9 x signal	1	1418739	1418742
			15 x signal	2	1418740	1418744
			25 x signal	3	1418741	1418745
		Gender changer	9 x signal	1	1652651	1688722
			15 x signal	2	1652677	1652664
			25 x signal	3	1652693	1652680
Hybrid		Solder cup	1 x power / 4 x signal	1	1689006	1689019
			2 x power / 5 x signal	2	1688227	1688230
			3 x power / 10 x signal	3	1689996	1690008
			4 x power / 5 x signal	3	1655386	1655373
			1 x power / 10 x signal	2	1418755	1418759
			2 x power / 15 x signal	3	1418757	1418760
			1 x power / 20 x signal	3	1418758	1418761
			1 x power / 4 x signal	1	1418762	1418766
		Straight solder pin	2 x power / 5 x signal	2	1418763	1418767
			1 x power / 10 x signal	2	1418771	1418775
			2 x power / 15 x signal	3	1418773	1418776
			1 x power / 20 x signal	3	1418774	1418777
			3 x power / 10 x signal	3	1418764	1418768
			4 x power / 5 x signal	3	1418765	1418770
			1 x power / 10 x signal	2	1418778	1418781
			2 x power / 15 x signal	3	1418779	1418782
			1 x power / 20 x signal	3	1418780	1418783
Power		Angled contact carrier, without contacts	2 x power	1	1655292	1655289
			3 x power	2	1655331	1655328
			5 x power	3	1655441	1655438
		Straight contact carrier, without contacts	2 x power	1	1688418	1688421
			3 x power	2	1688201	1688214
			5 x power	3	1689970	1689983

Panel mounting frames/sleeve housing

IP20 solid metal				IP20 metal-plated				IP67 plastic	
New		New		New		New			
									
Straight		Angled		Straight		Angled		Panel mounting frame	Sleeve housing
Screw locking	Snap-in locking	Screw locking	Snap-in locking	Screw locking	Snap-in locking	Screw locking	Snap-in locking		
								1688366	1688353
								1688036	1688052
								1689750	1689792
1419722	1419746	1419723	1419754	1419705	1419729	1419706	-	1688366	1688353
1419724	1419756	1419725	1419757	1419710	1419731	1419718	1419732	1688036	1688052
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
								1688366	
								1688036	
								1689750	
								1688366	
								1688036	
								1689750	
1419722	1419746	1419723	1419754	1419705	1419729	1419706	-	1688366	1688353
1419724	1419756	1419725	1419757	1419710	1419731	1419718	1419732	1688036	1688052
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
								1688366	
								1688036	
								1689750	
								1688366	
								1688036	
								1689750	
								1688366	
								1688036	
								1689750	
1419722	1419746	1419723	1419754	1419705	1419729	1419706	-	1688366	1688353
1419724	1419756	1419725	1419757	1419710	1419731	1419718	1419732	1688036	1688052
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
1419724	1419756	1419725	1419757	1419710	1419731	1419718	1419732	1688036	1688052
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792
								1688366	
								1688036	
								1688036	
								1689750	
								1689750	
								1689750	
								1689750	
								1689750	
								1688036	
								1689750	
								1689750	
								1688366	
								1688036	
								1689750	
1419722	1419746	1419723	1419754	1419705	1419729	1419706	-	1688366	1688353
1419724	1419756	1419725	1419757	1419710	1419731	1419718	1419732	1688036	1688052
1419727	1419758	1419728	1419759	1419719	1419736	1419721	1419741	1689750	1689792

IP65/67 M12 connectors

i Web code: #0338

									
		IDC connection		Spring connection		Piercecon connection		Screw connection	
Networks		Straight	Angled	Straight	Angled	Straight	Angled	Straight	Angled
Ethernet CAT5, 4-pos.	Pin	1411066	1553624					1521261	
	Socket	1411069	1553637						
Ethernet 8-pos.	Pin	1421679	1553653						
	Socket	1421680	1553666						
Ethernet CAT6A, 8-pos.	Pin	1411043				1417430	1417443		
	Socket	1414586							
	Pin	1411068	1554539	1436738	1436754			1521261	
	Socket	1411071	1554542	1436741	1436767				
	Pin	1429130	1429156						
	Socket	1429143	1429169						
Fieldbuses									
	Pin			1432800	1432813			1507764	1430417
	Socket			1432826	1432839			1507777	1430420
	Pin	1413931		1432842	1432855			1507764	1430417
	Socket	1413932		1432868	1432871			1507777	1430420
DeviceNet	Pin	1422759		1432761	1432774			1508352	
	Socket	1422760		1432787	1432790			1508365	
	Pin			1559767					
	Socket			1559770					

IP65/67 M12 device connectors

i Web code: #0339



M12 for networks		Pin	Socket	Pin	Socket	Pin	Socket	Straight	Angled	Length	Pin	Socket	Pin	Socket	
Ethernet	CAT5, 4-pos.	1456514	1456527	1552214*	1551451*	1411956*	1411950*						1411592	1411585	
	CAT5, 4-pos., cable type 93E									2 m		1405866			
	CAT5, 8-pos.	1456530	1456543	1557578	1557549			1414396	1414393						
	CAT5, 8-pos., cable type 94B									5 m		1407877			
	CAT5, 8-pos., cable type 94C									2 m		1412820			
	CAT6A, 8-pos.		1424177		1402457*		1411964*	1404549	1404548						
	CAT6A, 8-pos., cable type 94F										0.5 m		1424135		
											1 m		1424148		
											2 m		1424151		
											5 m		1424164		
	CAT5, 8-pos., hybrid		1407503		1405225*		1411965*							1407618	
	CAT5, 8-pos., hybrid, cable type 94H										0.5 m		1407504		
											1 m		1407505		
											2 m		1407506		
											5 m		1407507		
	4-pos.	1456556	1456569	1552175	1542648			1414398	1414397						
	4-pos., cable type 93B										0.5 m	1427805	1437766		
											1 m	1437818	1437779		
											2 m	1437821	1437782		
											5 m	1437834	1437795		
	4-pos., cable type 93C									2 m		1416209			
4-pos., cable type 93R									3 m		1416263				
	4-pos.	1457979	1457966												
	4-pos., cable type 93K										0.5 m	1410158	1419154		
											1 m	1419159	1419155		
											2 m	1419160	1419156		
											5 m	1419161	1419157		
	4-pos.	1456556	1456569												
	4-pos., cable type 93K										0.5 m	1419138	1419134		
											1 m	1419139	1419135		
											2 m	1419140	1419136		
											5 m	1419141	1419137		
M12 for fieldbuses															
	5-pos.	1456475	1456488							0.5 m	1534342	1534384			
	5-pos.	1456572	1456585							0.5 m	1534504	1534546			
	5-pos.	1456491	1456501							0.5 m	1534423	1534465			
	4-pos.	1457856	1457869												
	4-pos.	1457872	1457885										1431432	1431429	

* Two-piece versions. Associated housing connections can be found under the respective item accessories at phoenixcontact.com.

SC-RJ, push-pull interlocking (V14), IP65/67

i Web code: #0334

Connectors					P
New	New	New			
					
				Zinc die-cast	
Straight outlet	Angled outlet, at bottom	Angled outlet, at top		Round panel cutout	
Connectors for field connection					
Up to 100 Mbps, for POF	1407896	1407902	1408028		
Up to 100 Mbps, for PCF	1407897	1407904	1408055		
Panel mounting frames, equipped					
Panel mounting frames with coupler module, for POF, PCF, and GOF				1405235	
Panel mounting frames, unequipped					
Panel mounting frame for AVAGO transceiver					
Couplings, multi-ports, and terminal outlets					
Coupling, 1 x SC-RJ / 1 x SC-RJ					
Multi-port cable module, 1 x SC-RJ					
Multi-port cable module, 1 x SC-RJ / 1 x power					
Terminal outlet, 2 x SC-RJ					
Terminal outlet, 1 x SC-RJ / 1 x power					

SC-RJ, snap-in locking (V6), IP65/67

i Web code: #0334

 Web code: #0334	Connectors	Panel mounting frames		Socket insert	Coupling	Terminal outlets	Tool sets
							
	Plastic					Die-cast aluminum	
	Round panel cutout						
Connectors for field connection							
Up to 100 Mbps, for POF	1657009						1405246
Up to 100 Mbps, for PCF	1657012						2708876
Panel mounting frames, unequipped							
Panel mounting frame for Freenet modules		1653744	1658668				
Panel mounting frame for AVAGO transceiver		1658545					
Socket inserts for panel mounting frames							
Freenet coupler module fur POF, PCF, and GOF				1652978			
Couplings and terminal outlets							
Coupling, 1 x SC-RJ / 1 x SC-RJ					1410050		
Terminal outlet, 2 x SC-RJ						1404317	

Panel mounting frames		Coupling	Multi-ports	Terminal outlets	Tool sets
New 	New 				
Square panel cutout			Aluminum die-cast		
					1405246
					1411051
1413964					
	1413981				
		1405206			
			1404319		
			1404321		
				1404320	
				1404346	

M12 OPTIC, patch cables, couplings

i Web code: #0337

M12 OPTIC	SC-RJ IP20	M12 OPTIC	SC-RJ IP20	M12 OPTIC	LC duplex IP20
					
POF		PCF-GI		GOF MM	
980 / 1000 µm		200 / 230 µm		50 / 125 µm	

Patch cable

 M12 OPTIC	1 m	1408871	1408865	1408873	1408867	1408875	1408869
	2 m	1408870	1408864	1408872	1408866	1408874	1488868
	5 m	1416680	1416648	1416693	1416651	1416703	1416664

Coupling and transceiver

 M12 coupling	for POF, PCF, and GOF	1416677					
 M12 transceiver	for POF and PCF	1416716					
	for GOF					1416729	

You can find further information and our video animation on FO-based data connectors under:

i Web code: #0298

Fiber-optic connectors for assembly

i Web code: #0332

LC			SC	
Connectors		Couplings	Connectors	
				

GOF

Multimode connectors	1411294	1411052		1411296	1411292
Single mode PC connectors	1411295	1411053		1411297	1411293
Single mode APC connectors	1412476	1412472		1412478	1412474
Couplings			2700312		

PCF

SC, SC-RJ connectors (Ø 2...3 mm)					
SC, SC-RJ connectors (Ø 2.2 mm)					2313779
ST connectors (Ø 2.2 mm)					
SC-RJ connectors (Ø 2.9 mm)					
F-SMA connectors (Ø 2.9 mm)					
ST connectors (Ø 2.9 mm)					
Couplings					

POF

SC-RJ connectors					
F-SMA connectors					
Couplings					

Fiber optics, patch panels, and socket inserts, IP20

i Web code: #0336

Patch panels		IP20 junction boxes			Socket inserts
					
DIN rail mounting	19" mounting	Surface mounting		Flush mounting	Coupler modules
Plastic, gray		Plastic, white			

Patch panels

Incl. coupler module, SC-RJ, for POF, PCF, and GOF 16 installation slots, for Freenet modules, unequipped	1658121	1652994			
---	---------	---------	--	--	--

Junction boxes for Freenet modules

Surface mounted, unequipped, for 2 modules		1653003			
Surface mounted, unequipped, for 6 modules			1653029		
Flush mounted, unequipped, for 2 modules				1653016	

Freenet modules

Coupler module, SC-RJ, for POF, PCF, and GOF					1654358
Coupler module, LC duplex, multimode					2700312
Coupler module, LC duplex, single mode					2700313

	SC-RJ		F-SMA		ST (B-FOC)		
Couplings	Connectors	Couplings	Connectors	Couplings	Connectors	Couplings	Tool sets
							
	1411290						1411049
	1411291						1411049
	1412473						1411049
2901788		1652978		2799416		2799429	
	1411304						1411051
	1404087						2708876
					2313782		2708465
	1654866						2708876
			2799487				2799526
					2708481		2708465
2901788		1652978		2799416		2799429	
	1654879						1405246
			2799720				2744131
2901788		1652978		2799416		2799429	

Fiber optics, splice boxes, IP20

i Web code: #0336

DIN rail mounting			19" mounting	
				
6 x LC duplex	6 x SC duplex	12 x ST simplex	12 x LC duplex	24 x LC duplex

Splice boxes for DIN rail mounting

Multimode, unequipped	1411901	1411902	1411903	
OM2, equipped and splice-ready	1420318			

Splice boxes for 19" mounting

OM2, gray, equipped and splice-ready			1418815	1418816
OM4, black, equipped and splice-ready			1418817	1418818

Fiber optics, fiberglass zip cords, multimode, IP20

i Web code: #0333

Variable lengths 1 m ... 1000 m

		FSMA	SC-RJ	SC duplex	ST (B-FOC)	LC duplex
						
FSMA	Fiber type					
	OM1	1409855		1406536	1406535	1413787
	OM2					
	OM3					
	OM4					
SC-RJ						
	OM1					
	OM2		1405703	1405700	1405710	1405694
	OM3		1405704	1405701	1405711	1405695
	OM4		1405705	1405702		1405696
SC duplex						
	OM1	1406536		1413790	1413791	1413789
	OM2		1405700	1405697	1405708	1405691
	OM3		1405701	1405698	1405709	1405692
	OM4		1405702	1405699		1405693
ST (B-FOC)						
	OM1	1406535		1413791	1413821	1413792
	OM2		1405710	1405708	1405712	1405706
	OM3		1405711	1405709		1405707
	OM4					
LC duplex						
	OM1	1413787		1413789	1413792	1413788
	OM2		1405694	1405691	1405706	1405688
	OM3		1405695	1405692	1405707	1405689
	OM4		1405696	1405693		1405690

Fiber optics, fiberglass zip cords, single mode, IP20


i Web code: #0333

		Fixed lengths		
		LC duplex	SC duplex	ST (B-FOC)
				
LC duplex	Cable length	OS2	OS2	OS2
	1 m	2989187	2989190	2989242
	2 m	2989284	2989297	2989349
	5 m	2901826	2901827	2901828
SC duplex				
	1 m	2989190	2901829	2901832
	2 m	2989297	2901830	2901833
	5 m	2901827	2901831	2901834
ST (B-FOC)				
	1 m	2989242	2901832	2901836
	2 m	2989349	2901833	2901837
	5 m	2901828	2901834	2901838

	Zipcord fiber classes	Sheath color	Fiber type	Typical range	Typical wavelength	Wire structure
Multi mode		Orange	OM1	1000Base-SX: min. 350 m 1000Base-LX: min. 550 m	850 nm 1300 nm	
		Orange	OM2	1000Base-SX: min. 525 m 1000Base-LX: min. 1000 m	850 nm 1300 nm	
		Aqua	OM3	1000Base-SX: min. 1000 m 1000Base-LX: min. 550 m 10GBase-SX: min. 300 m	850 nm 1300 nm	
		Heather violet	OM4	1000Base-SX: min. 1040 m 1000Base-LX: min. 600 m 10GBase-SX: min. 550 m	850 nm 1300 nm	
Single mode		Yellow	OS2	10GBase-LR: min. 10 km 10GBase-ER: min. 40 km	1310 nm 1550 nm	

Customer-specific solutions

Variability takes many forms: different geometries, printings, and colors or individual packaging make numerous solutions possible. In addition to customer-specific adaptations, Phoenix Contact also makes custom-tailored innovations according to your needs. We provide you support from the initial idea to development and production to quality assurance.

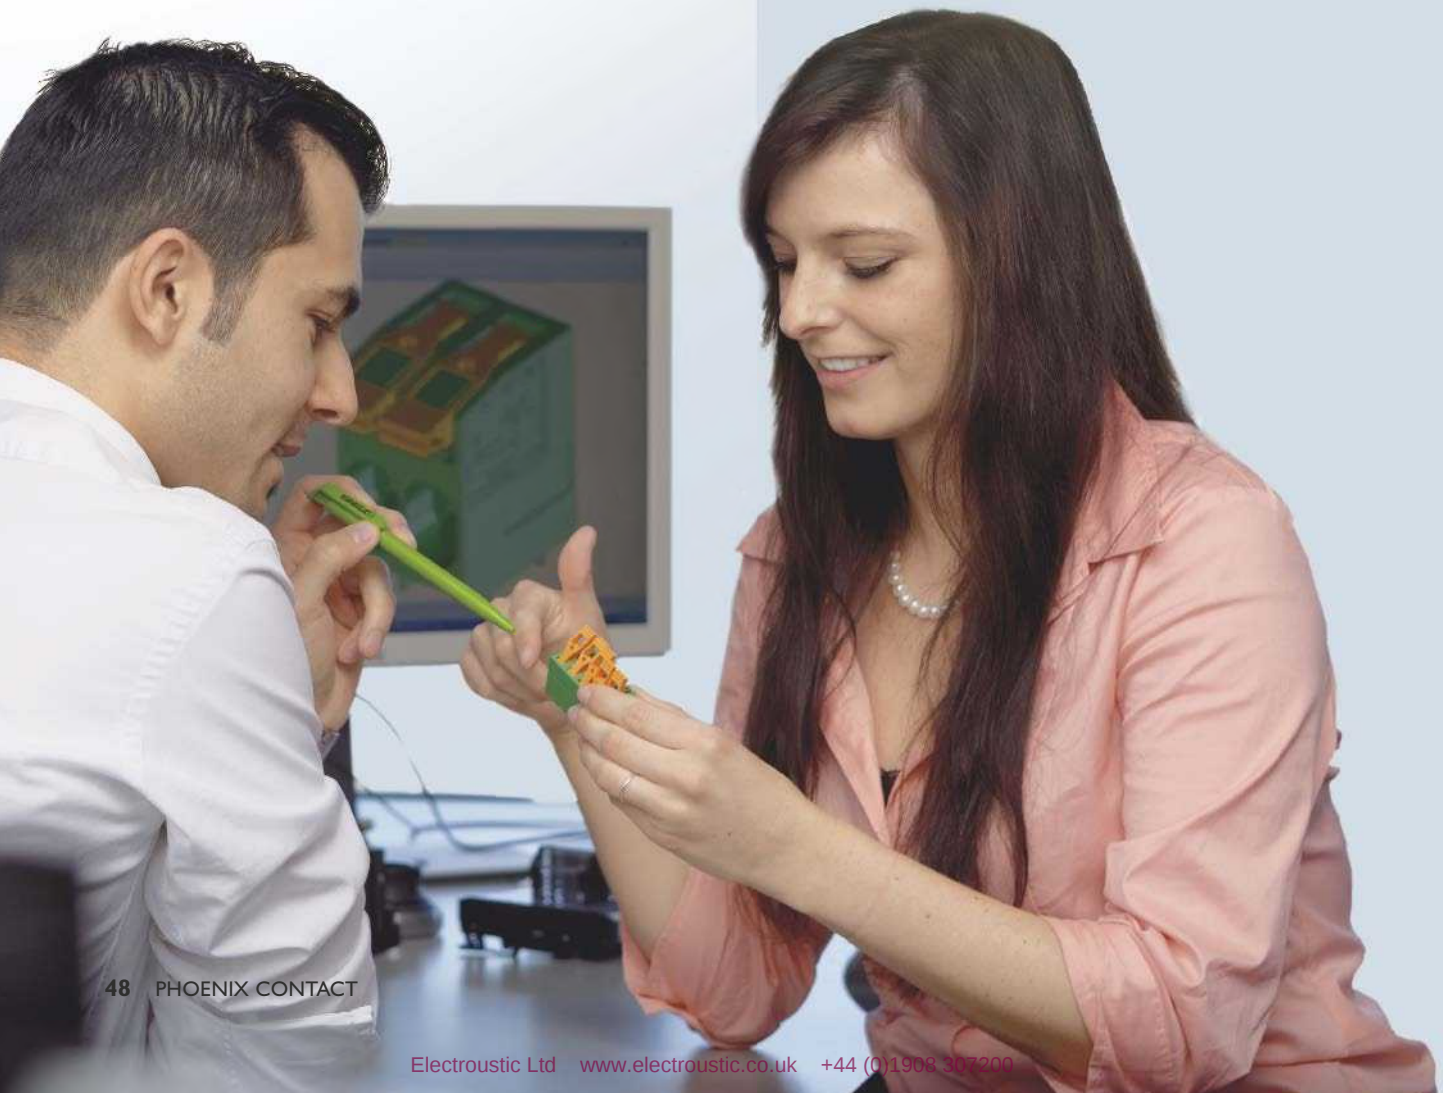

Cables and connectors

Marking


Individually printed cable assemblies according to your guidelines

Most variety

Molded connectors and connectors for assembly with cables or litz wires for direct circuit board assembly



Web code:
#1170

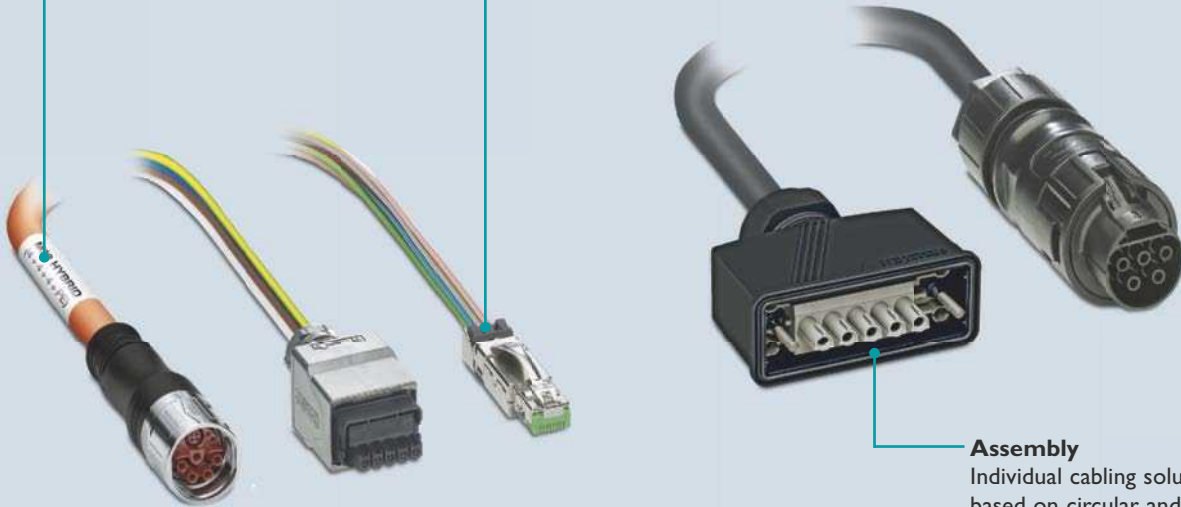

Assembly

Individual cabling solutions based on circular and rectangular connectors

Your individual cabling solution



Assembly

Thanks to a multitude of designs, codings, and pin assignments, we can bring you consistent solutions for transmitting signals, data, and power. You can also receive assemblies with add-on components.



Marking

We print your cables according to your specific guidelines. We have the right technique for every need, whether it be printing directly on the cable or using wrap-around labels.



Labeling and packaging

You receive your individual cable assemblies in similarly individual packaging. On request, we will label these with your logo or with a barcode.

Electronics housings

Marking

Different marking processes fulfill every requirement



Web code:
#0685



Color options

Electronics housings are produced in individual colors

Mechanical processing

Producing customer-specific cutouts on each side of the housing

Individualize your housings




Color options

We also produce electronics housings in colors other than the standard color, either completely or as a combination of different colored housing parts. Our ability to reproduce your own company color maximizes brand recognition value.



Mechanical processing

We make customer-specific cutouts on each side of the housing with our state-of-the-art milling machines. This means that you do not have to carry out additional manufacturing work or deal with the associated logistical issues.

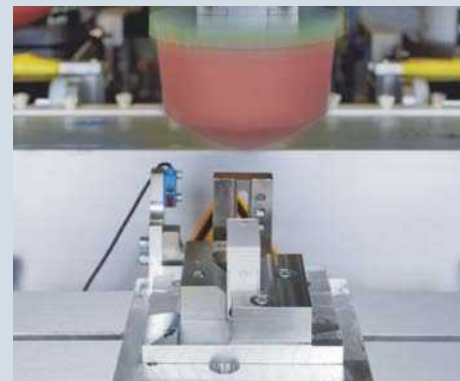

Marking

We mark your housing or housing components according to your guidelines. By offering pad and screen printing as well as laser marking, we have the appropriate marking technique for every need.

PCB terminal blocks and PCB connectors

Color options

PCB terminal blocks and PCB connectors are available in various colors

Coding

Individually-coded connectors and headers prevent mismatching





Customer-specific innovation

An individual solution according to your specifications

Marking

Marking connection components individually

Individual solutions thanks to variants

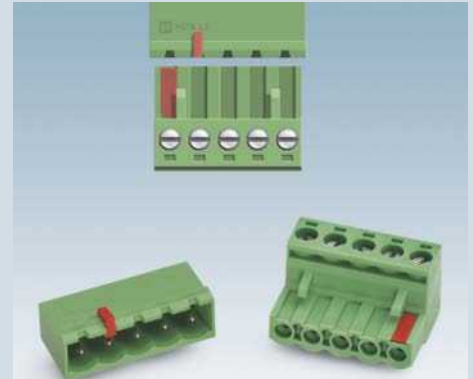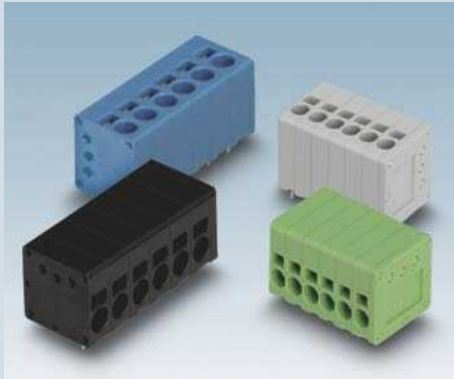

Color options

Phoenix Contact offers PCB terminal blocks and PCB connectors in the color variants green, black and light gray under standard conditions. In addition, gray versions are available for connectors and blue for PCB terminal blocks. Other colors on request.

Marking

Phoenix Contact offers different printing techniques and directions for marking individual connection components. Black product housings are printed in white and all other colors in black. Complex printings on request.

Coding

In order to avoid mismatching, Phoenix Contact offers coded connectors and headers. They are coded either by using a coding profile, tab or pin, or by removing the coding tap.

In dialog with customers and partners worldwide

Phoenix Contact is a globally present, Germany-based market leader. Our group is synonym for future-oriented components, systems, and solutions in the fields of electrical engineering, electronics, and automation. A global network across more than 100 countries, and 14,500 employees ensure a close proximity to our customers, which we believe is particularly important.

The wide variety of our innovative products makes it easy for our customers to find future-oriented solutions for different applications and industries. We especially focus on the fields of energy, infrastructure, process and factory automation.



You will find our complete product range at:
phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
32825 Blomberg, Germany
Phone: +49 52 35 3-00
Fax: +49 52 35 3-4 12 00
E-mail: info@phoenixcontact.com
phoenixcontact.com