


**Product information**  
**0911 ANC 002/5 M**  
**10925**

Name	
Name	0911 ANC 002/5 M
	
	AS-Interface passive module to connect 4 AS-Interface sensors, AS-Interface actuators or AS-Interface round cable modules, 4 ports, combined FIXCON/M12 socket, with connection for AS-Interface standard round cables
<b>Delivery informations</b>	
Availability	available
<b>Product description</b>	
Type	0911 ANC 002/5 M
Order No.	10925
Description	AS-Interface passive module to connect 4 AS-Interface sensors, AS-Interface actuators or AS-Interface round cable modules, 4 ports, combined FIXCON/M12 socket, with connection for AS-Interface standard round cables
Note	The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.
Version	4 ports
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance
<b>Classification</b>	
Belden class	AS-Interface Passive Modules
Belden brand	Lumberg-Automation
<b>Mechanical data</b>	
Dimensions (W x H x D)	60 mm x 118 mm x 35.8 mm
<b>Environmental conditions</b>	
Environmental temperature	-25 °C ... 80 °C
Degree of protection (IP), mounted	IP67
<b>Materials</b>	
Housing material / Molded body	PUR
<b>Cable</b>	
Cable length	5 m
Cable number	41
Cable description	Bus cable
Color of jacket	orange
Material of outer jacket	PUR
Outer diameter of the cable	7.2 mm
Nominal diameter of the cable - amount	2
Nominal diameter of the cable - diameter	1.50 mm <sup>2</sup>
Diameter of conductor - Number	192
Diameter of conductor	0.10 mm
Flame resistant according to standard	acc. IEC 60332-1-2

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture  
Drawing

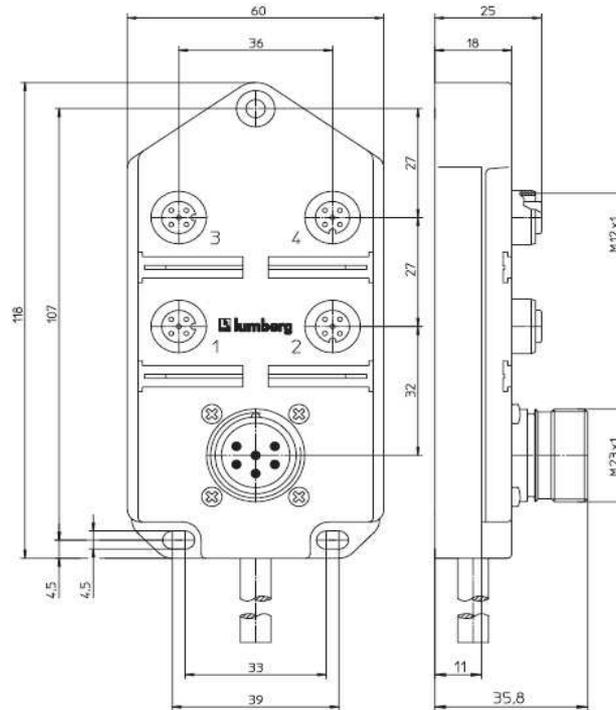

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.