



Product information
RSWU 12-SB 8/LED 3-333/5 M
60724


Name	RSWU 12-SB 8/LED 3-333/5 M
	
	Miniature sensor distribution box, 8-port version, with LED operation and function indicators, screw-lock M8 socket, 3-pole, 1 signal per socket, fixed control cable with M23 male right angle connector - 12 poles, 5 meter.
Delivery informations	
Availability	available
Product description	
Type	RSWU 12-SB 8/LED 3-333/5 M
Order No.	60724
Description	Miniature sensor distribution box, 8-port version, with LED operation and function indicators, screw-lock M8 socket, 3-pole, 1 signal per socket, fixed control cable with M23 male right angle connector - 12 poles, 5 meter.
Number of contacts	3 (M8)
Version	8 ports
Color of housing	orange
Product characteristics	Vibration resistance, Oil resistance, Drag chains suitable
Classification	
Belden brand	Lumberg-Automation
Mechanical data	
Thread	M8
LED display present	✔
Environmental conditions	
Environmental temperature	-15 °C ... 80 °C
Degree of protection (IP), mounted	IP67
Pollution degree	3
Materials	
Housing material / Molded body	TPU, self-extinguishing
Contact bearer material	TPU (M8)
Contact material	CuZn
Contact material - Surface refinement	pre-nickel and 0.8 microns gold-plated
Contact bearer material, side 2	PBT (M23)
Knurled screw / nut material	CuZn, nickel-plated
Sealing material	FKM
Electrical data	
Contact resistance	≤ 5 mΩ
Rated current In	2 A per socket / 2 A max. at 40 °C
Nominal voltage	10 - 30 V DC
Insulation resistance	> 1 GΩ
Approvals	
Approvals	cURus
Cable	
Cable length	5 m
Cable number	333
Cable description	Control cable
Color of jacket	black
Material of outer jacket	PUR

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Outer diameter of the cable	8.8 mm
Number of conductors	10
Cable design	2 x 0.5 mm ² + 8 x 0.34 mm ²
Flame resistant according to standard	IEC 60332-2, CSA FT-2
Scope of delivery and accessories	
Scope of delivery	ZVK: 2 Schutzkappen für nicht belegte Kupplungsgehäuse ZBS: 10 Beschriftungsschilder

Picture
Drawing

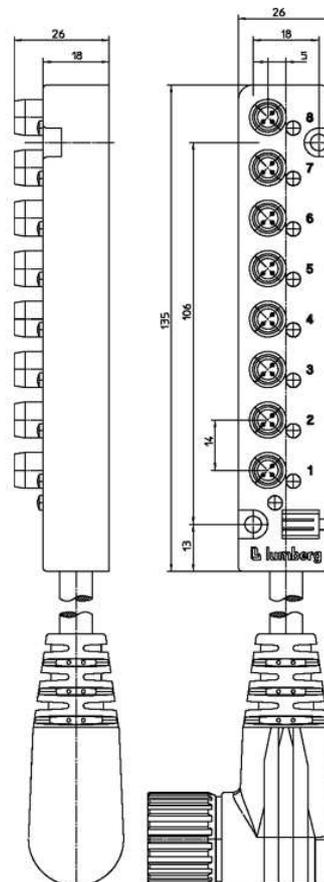

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.