




Product information
STAK 3 K 075 3025mm
932 187-011

Name	
STAK 3 K 075 3025mm	
	
Molded-on cable socket with harmonized lead (DIN VDE 0282)	
Delivery informations	
Availability	available
Product description	
Description	Molded-on cable socket with harmonized lead (DIN VDE 0282)
Type	STAK 3 K 075 3025mm
Order No.	932 187-011
Other standard types	cable length 5 m: order no. 932 187-015; cable length 10 m: order no. 932 187-016
Type of contact	female
Number of contacts	3 + PE
Cable color	black
Cable length	3 m
Cable diameter	7.5 mm
Conductor size	0.75 mm ²
Cable specification	4 x 0.75 mm ²
Cable type	H05 RR-F4G 0,75
Housing Color	black
Contact bearer color	black
Technical data	
Pin dimensions	2 mm
Rated voltage	AC 400 V / DC 250 V
Rated current	DC 10 A / AC 10 A
Contact resistance	<= 5 mOhm
Material	
Contact material	Cu Zn
Contact surface material	Sn
Contact bearer material	PA
Housing material	PA
Environmental conditions	
Protection class (IEC 60529)	IP 54
Pollution severity	3
Temperature range	-30°C to +90°C (connector) / -25°C to +60°C (cable)
Inflammability class	
Housing	UL 94 HB
Cable	VDE 0472 part 804
Contact bearer	UL 94 V-0
Approvals	
VDE	VDE
SEV	SEV
Packing unit	
Packaging unit	75 pieces
Scope of delivery and accessories	
Accessories to order separately	safety brackets STASI 3, order no. 732 045-000

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.



Picture
Drawing

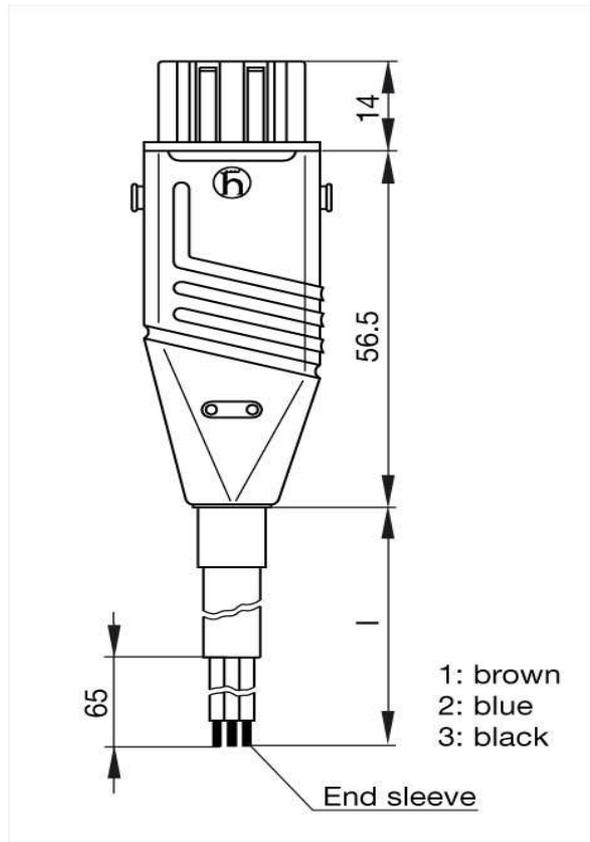

The information published has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price related/commercial respect.